


Service Manual

PM7200 /N1B/N1G

Integrated Amplifier

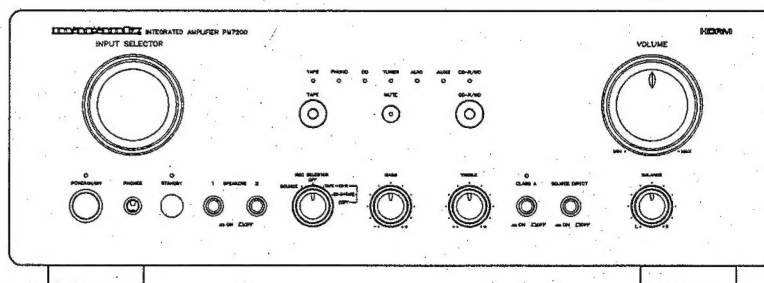

REMARK : This service manual shows only the differences between the model PM8000 /N1B /N1G and the model PM7200 /N1B/N1G.

All other information is described in the service manual of the model PM8000 (code number: 3120 785 22011 and 276W855010). For the dispatch of the after-sales service parts, refer to those service manuals with the first priority.

Therefore, please use this document with referring to the model PM8000 service manual without fail.

The changed parts are listed below. Not listed parts are the same to the model PM8000.

POS. NO.	VERS. COLOR	PART NO. (FOR EUR)	DESCRIPTION	PART. NO. (MJI)
200	/N1B	20AW248010	FRONT PANEL BLACK 3120 201 60420	20AW248010
200	/N1G	20AW248020	FRONT PANEL GOLD 3120 201 60430	20AW248020
387		20AW851310	USER GUIDE 3120 205 20390	20AW851310

NOTE : "nsp" PART IS LISTED FOR REFERENCE ONLY, MARANTZ WILL NOT SUPPLY THESE PARTS.

Please use this service manual with referring to the user guide (D.F.U.) without fail.

修理の際は、必ず取扱説明書を準備し操作方法を確認の上作業を行ってください。

marantz®


PM7200

20AW855010 MIT
First Issue 2002.07

PM7200

Service Manual

PM7000 /N1B, /N1G, /U1B
PM8000 /N1B, /N1G, /F1B, /F1N
Integrated amplifier

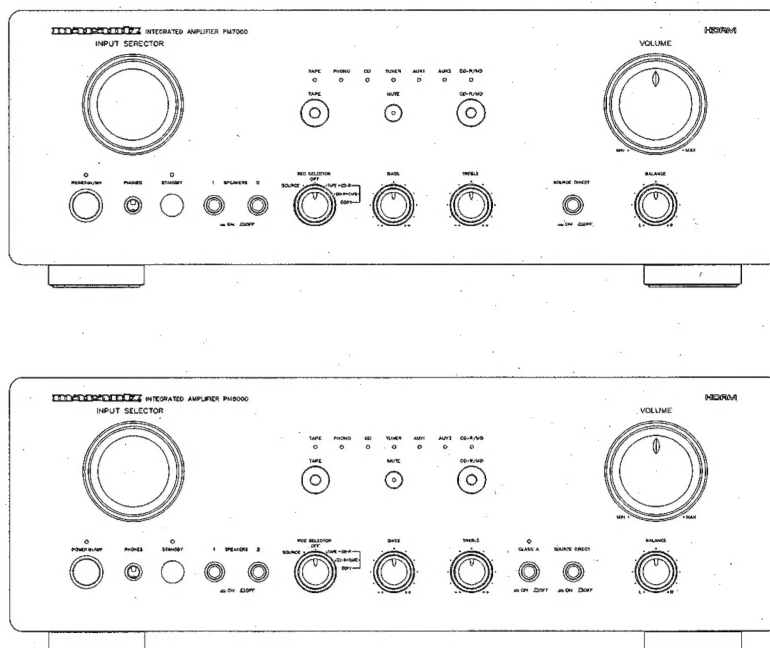

PM7000/8000

TABLE OF CONTENTS

SECTION	PAGE
1. SPECIFICATIONS	1
2. TEST EQUIPMENT REQUIRED SERVICING	2
3. IC INFORMATIONS	3
4. BLOCK DIAGRAM	5
5. WIRING DIAGRAM	7
6. SCHEMATIC DIAGRAM AND PARTS LOCATION (PARTS SIDE)	9
7. EXPLODED VIEW AND PARTS LIST	33
8. IDLING CURRENT AND DC OFFSET VOLTAGE ALIGNMENT	34
9. ELECTRICAL PARTS LIST	35

Please use this service manual with referring to the user guide (D.F.U) without fail.

修理の際は、必ず取扱説明書を準備し操作方法を確認の上作業を行って下さい。

marantz®

- PM7000 / PM8000 -

MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, **MARANTZ** company has created the ultimate in stereo sound. Only original **MARANTZ** parts can insure that your **MARANTZ** product will continue to perform to the specifications for which it is famous.

Parts for your **MARANTZ** equipment are generally available to our National Marantz Subsidiary or Agent.

ORDERING PARTS :

Parts can be ordered either by mail or by Fax.. In both cases, the correct part number has to be specified.

The following information must be supplied to eliminate delays in processing your order :

1. Complete address
2. Complete part numbers and quantities required
3. Description of parts
4. Model number for which part is required
5. Way of shipment
6. Signature : any order form or Fax. must be signed, otherwise such part order will be considered as null and void.

USA

MARANTZ AMERICA, INC.
440 MEDINAH ROAD
ROSELLE, ILLINOIS 60172
USA
PHONE : 630 - 307 - 3100
FAX : 630 - 307 - 2687

EUROPE / TRADING

MARANTZ EUROPE B.V.
P.O.BOX 80002, BUILDING SFF2
5600 JB EINDHOVEN
THE NETHERLANDS
PHONE : +31 - 40 - 2732241
FAX : +31 - 40 - 2735578

BRAZIL

MARANTZ BRAZIL
CAIXA POSTAL 21462
CEP 04698-970
SAO PAULO, SP, BRAZIL
PHONE : 0800 - 123123(Discagem Direta Gratuita)
FAX : +55 11 534. 8988

PROFESSIONAL AMERICAS

SUPERSCOPE TECHNOLOGIES, INC.
MARANTZ PROFESSIONAL PRODUCTS
2640 WHITE OAK CIRCLE, SUITE A
AURORA, ILLINOIS 60504 USA
PHONE : 630 - 820 - 4800
FAX : 630 - 820 - 8103

CANADA

LENBROOK INDUSTRIES LIMITED
633 GRANITE COURT,
PICKERING, ONTARIO L1W 3K1
CANADA
PHONE : 905 - 831 - 6333
FAX : 905 - 831 - 6936

AUSTRALIA

JAMO AUSTRALIA PTY LTD
1 EXPO COURT, P.O. BOX 350
MT. WAVERLEY VIC 3149
AUSTRALIA
PHONE : +61 - 3 - 9543 - 1522
FAX : +61 - 3 - 9543 - 3677

THAILAND

MRZ STANDARD CO.,LTD
746 - 754 MAHACHAI ROAD.,
WANGBURAPAPIROM, PHRANAKORN,
BANGKOK, 10200 THAILAND
PHONE : +66 - 2 - 222 9181
FAX : +66 - 2 - 224 6795

SINGAPORE

WO KEE HONG (S) PTE LTD
WO KEE HONG CENTRE
NO.23, LORONG 8, TOA PAYOH
SINGAPORE 319257
PHONE : +65 2544555
FAX : +65 2502213

TAIWAN

PAI-YUING CO., LTD.
6 TH FL NO, 148 SUNG KIANG ROAD,
TAIPEI, 10429, TAIWAN R.O.C.
PHONE : +886 - 2 - 25221304
FAX : +886 - 2 - 25630415

MALAYSIA

WO KEE HONG ELECTRONICS SDN. BHD.
SUITE 8.1, LEVEL 8, MENARA GENESIS,
NO. 33, JALAN SULTAN ISMAIL,
50250 KUALA LUMPUR, MALAYSIA
PHONE : +60 3 - 2457677
FAX : +60 3 - 2458180

JAPAN Technical

MARANTZ JAPAN, INC.
35- 1, 7- CHOME, SAGAMIONO
SAGAMIHARA - SHI, KANAGAWA
JAPAN 228-8505
PHONE : +81 42 748 1013
FAX : +81 42 741 9190

日本マランツ株式会社

本社 〒228-8505
神奈川県相模原市相模大野7-35-1
営業本部 〒150-0022
東京都渋谷区恵比寿南1-11-9

KOREA

MK ENTERPRISES LTD.
ROOM 604/605, ELECTRO-OFFICETEL, 16-58,
3GA, HANGANG-RO, YONGSAN-KU, SEOUL
KOREA
PHONE : +822 - 3232 - 155
FAX : +822 - 3232 - 154

SHOCK, FIRE HAZARD SERVICE TEST :

CAUTION : After servicing this appliance and prior to returning to customer, measure the resistance between either primary AC cord connector pins (with unit NOT connected to AC mains and its Power switch ON), and the face or Front Panel of product and controls and chassis bottom.

Any resistance measurement less than 1 Megohms should cause unit to be repaired or corrected before AC power is applied, and verified before it is return to the user/customer.

Ref. UL Standard No. 1492.

In case of difficulties, do not hesitate to contact the Technical
Department at above mentioned address.

1. SPECIFICATIONS

Power output (class AB operation)

RMS 8ohms (20 Hz - 20 kHz)	95W
DIN 8 ohms	105W
THD at 8 ohms RMS rated output	0.03%
Damping factor	150

Power out put (PM8000 classA operation)

RMS 8 ohms (20 Hz - 20 kHz)	25 W
DIN 8 ohms	28 W
THD at 8 ohms RMS. rated output	0.03%
Damping factor	130

IHF dynamic power (class AB operation)

8 ohms	120 W
--------	-------

IHF dynamic power (PM8000 class A operation)

8 ohms	35 W
--------	------

Magnetic cartridge input (MM)

input sensitivity impedance	2.5 mV/47 kOhms
Accuracy of frequency response to IEC RIAA	0.5 dB
Signal to noise ratio	85 dB

Tuner/CD/Aux/Tape inputs

input sensitivity impedance	150 mV/40 kOhms
Signal to noise ratio	109dB
Frequency response	
(-1 dB limits, Source Direct)	10 Hz - 50 kHz
Tone characteristic (100 Hz and 10 kHz)	±8 dB
Channel separation	
(1 kHz/10 kHz, Source direct)	>80 / >70 dB

General

Power Requirements

/N versions	230 V AC,50 Hz
/U versions	120 V AC,60 Hz

Dimensions

Width	440 mm
Height	159 mm
Depth	370.5 mm

Weight

Unit alone	12.3 kg
------------	---------

Specifications subject to change without prior notice

定格出力(20 Hz - 20 kHz 両チャンネル同時駆動)

クラスAB.....95 W × 2 (8 Ω 負荷)

クラスA.....25 W × 2 (8 Ω 負荷)

全高周波歪率(20 Hz - 20 kHz, 10 W出力時8 Ω負荷)

クラスAB.....0.015%

クラスA.....0.010%

混変調歪率 (SMPTE).....0.015%

出力帯域幅 (8Ω負荷,0.08%歪率).....10 Hz - 80 kHz

周波数特性

(CD,ソースダイレクト).....10 Hz - 50 kHz +0 dB -1 dB

ダンピングファクター (8 Ω負荷,100 Hz - 10 kHz).....130

入力感度/入力インピーダンス

PHONO (MM).....2.5 mV/47 kΩ

HIGH LEVEL.....150 mV/40 kΩ

PHONO最大許容入力 (1 kHz)

(MM).....150 mV

RIAA偏差 (20 Hz).....-2 dB

(40 Hz - 20 kHz).....±0.5 dB

S/N比 (IHF,Aネットワーク,入力ショート)

PHONO (MM).....85 dB

HIGH LEVEL.....109 dB

トーンコントロール

BASS (100 Hz).....±8 dB

TREBLE (10 kHz).....±8 dB

電源電圧.....AC 100 V, 50 Hz/60 Hz

消費電力 (電気用品取締法).....160 W

最大外形寸法

幅.....440 mm

高さ.....159 mm

奥行き.....370.5 mm

質量.....12.3 kg

付属品

リモートコントロール送信機(RC8000PM).....1台

本機の規格および外観は改良のため予告なく変更することがあります。


2.TEST EQUIPMENT REQUIRED FOR SERVICING

Item	Use
Distortion Analyzer	Distortion measurements
Audio Oscillator	Sinewave and squarewave signal source
AC VTVM	Voltage measurements (AC)
Oscilloscope	Waveform analysis and trouble shooting and ASO alignment
DC VTVM	Voltage measurements (DC)
AC Wattmeter	Monitors primary power to amplifier
Line Voltmeter	Monitors of primary voltage to amplifier
Variable Autotransformer	Adjust level of primary voltage to amplifier
Circuit Tester	Trouble shooting
Shorting Plug	Shorts amplifier input to eliminate noise pickup

項 目	使 用 方 法
歪 率 計	歪の測定
低 周 波 発 振 器	正弦波および矩型波の信号源
A C V T V M	交流電圧の測定
オ シ ロ ス コ ー プ	波計分析、トラブルシューティングおよびASOの調整
D C V T V M	直流電圧の測定
交流ワットメーター	アンプの一次側消費電力のモニター
電 源 電 圧 計	アンプの一次側電圧のモニター
ス ラ イ ダ ッ ク	アンプの一次側電圧の調整
テ ス タ ー	トラブルシューティング
ショート用プラグ	雑音を拾わないようにアンプ入力を短絡する

3. IC INFORMATION

MICROPROCESSOR TMP47C200BM BLOCK DIAGRAM

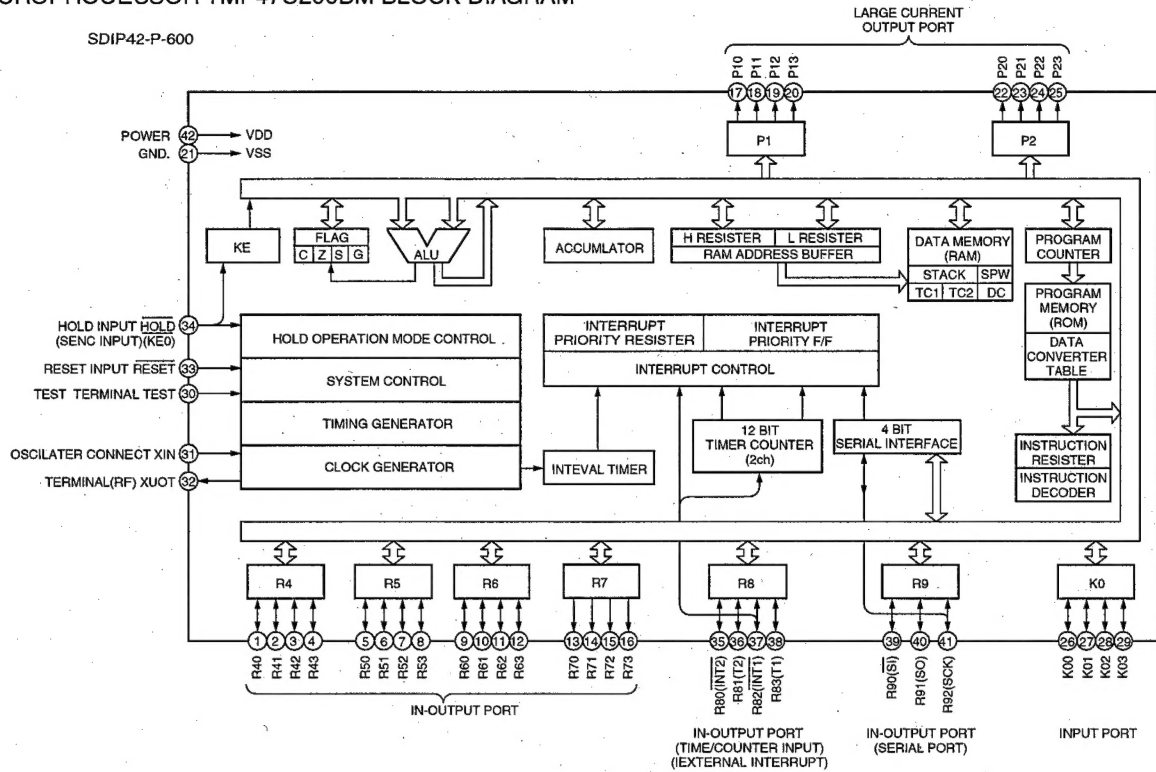


PIN no.	PORT NAME	ACT	FUNCTION
1	R40	MMUT	H MANUAL MUTE SIGNAL MUTE
2	R41	FMUT	L SIGNAL(SOURCE/MONITOR SWITCH)
3	R42	VOUP	L MOTOR DRIVE VOLUME UP
4	R43	VODW	L MOTOR DRIVE VOLUME DOWN
5	R50	T3K	L MONITOR INPUT SWITCH (TAPE3)
6	R51	T2K	L MONITOR INPUT SWITCH (TAPE2)
7	R52	T1K	L MONITOR INPUT SWITCH (TAPE1)
8	R53	AX2K	L SOURCE INPUT SWITCH (AUX2)
9	R60	AX1K	L SOURCE INPUT SWITCH (AUX1)
10	R61	TUNK	L SOURCE INPUT SWITCH (TUNER)
11	R62	CDK	L SOURCE INPUT SWITCH (CD)
12	R63	PHOK	L SOURCE INPUT SWITCH (PHONO)
13	R70	LSTB	L LED INDICATOR STAND BY DISPLAY
14	R71	LMUT	L LED INDICATOR MUTE DISPLAY
15	R72	LPRO	L LED INDICATOR PROCESSOR DISPLAY
16	R73	LTP3	L LED INDICATOR TAPE3 DISPLAY
17	P10	LTP2	L LED INDICATOR TAPE2 DISPLAY
18	P11	LTP1	L LED INDICATOR TAPE1 DISPLAY
19	P12	LSOU	L LED INDICATOR SOURCE DISPLAY
20	P13	LAX2	L LED INDICATOR AUX2 DISPLAY
21	VSS		GND.
22	P20	LAX1	L LED INDICATOR AUX1 DISPLAY
23	P21	LTUN	L LED INDICATOR TUNER DISPLAY
24	P22	LECD	L LED INDICATOR CD DISPLAY
25	P23	LPHO	L LED INDICATOR PHONO DISPLAY
26	K00	1RS	L SOURCE INPUT SWITCH(ROTARY ENCODER) bit1
27	K01	2RS	L SOURCE INPUT SWITCH(ROTARY ENCODER) bit2
28	K02	PRK	L PROCESSOR IN-OUT SWITCH
29	K03	MUK	L MANUAL MUTE
30	TEST		NOT USED (GND)
31	XIN		CLOCK 4.00 MHz (IN)
32	XOUT		CLOCK 4.00 MHz (OUT)
33	RESET	RES	L SYSTEM RESET
34	HOLD	PDW	L POWER DOWN CHECK
35	R80	FXRC	L REMOTE CONTROL INPUT (RC-5)
36	R81	EN1	MODEL SELECT 1
37	R82	EN2	MODEL SELECT 2
38	R83	EN3	MODEL SELECT 3
39	R90	TXRC	L SERIAL DATA(RC-5 REMOTE CONTROL)
40	R91	ENTX	L ENABLE (REMOTE CONTROL)
41	R92	RELY	L STAND-BY RELAY CONTROL
42	VDD		POWER SUPPLY


MICROPROCESSOR TMP47C200BM

Position NO.7401


SDIP42-P-600

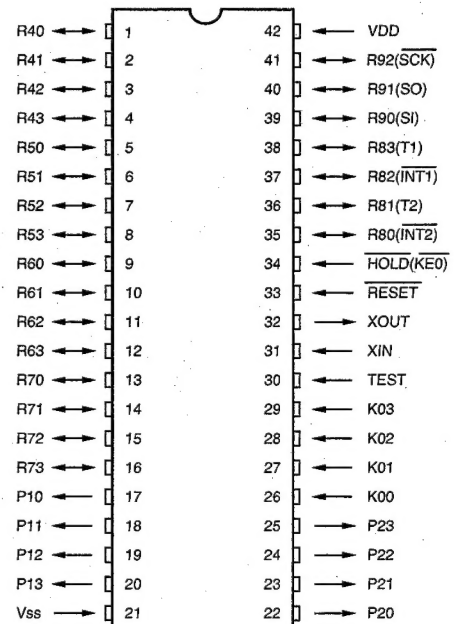


TA7317P (Position NO.7290)

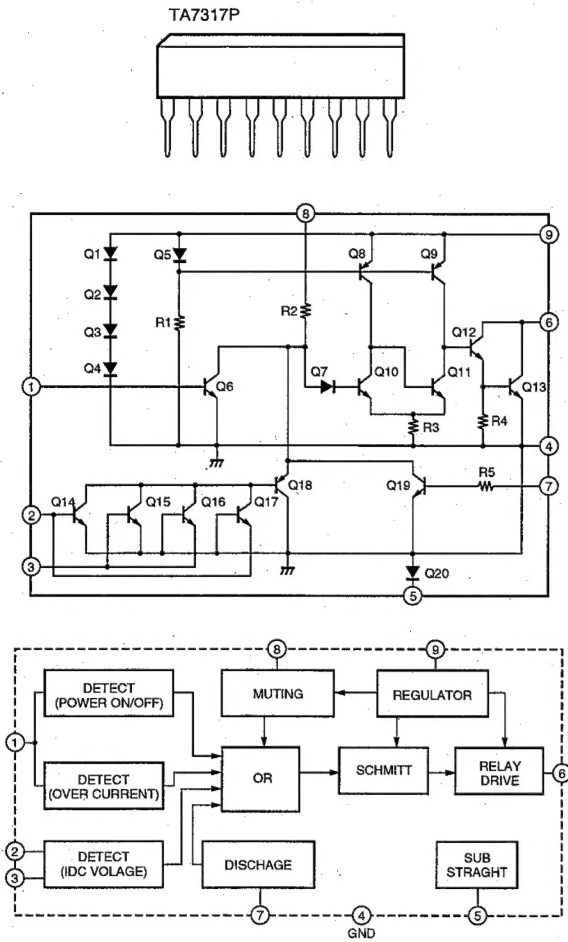


LB1641(Position NO.7402)

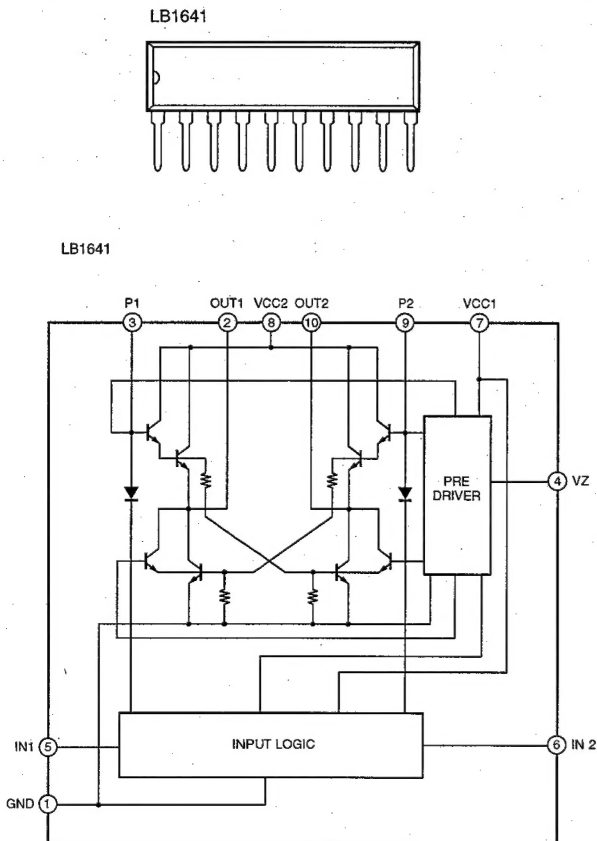


NJM2068 (Position NO.7501,7502,7503)

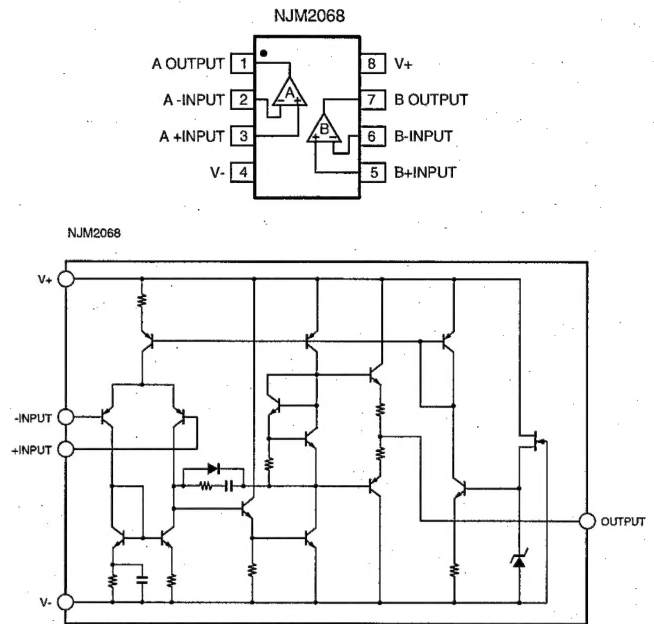


PC817 (Position NO.7269,7270)

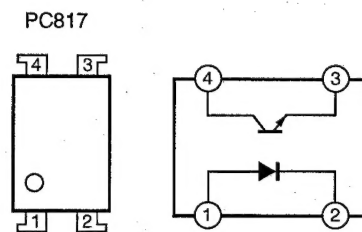

NJM2114(Position NO.7555,7655)

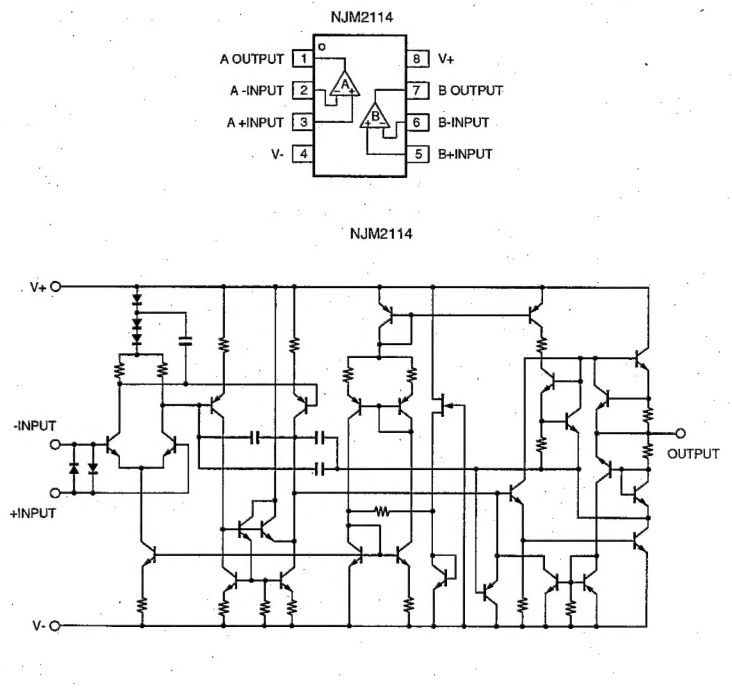


4. BLOCK DIAGRAM

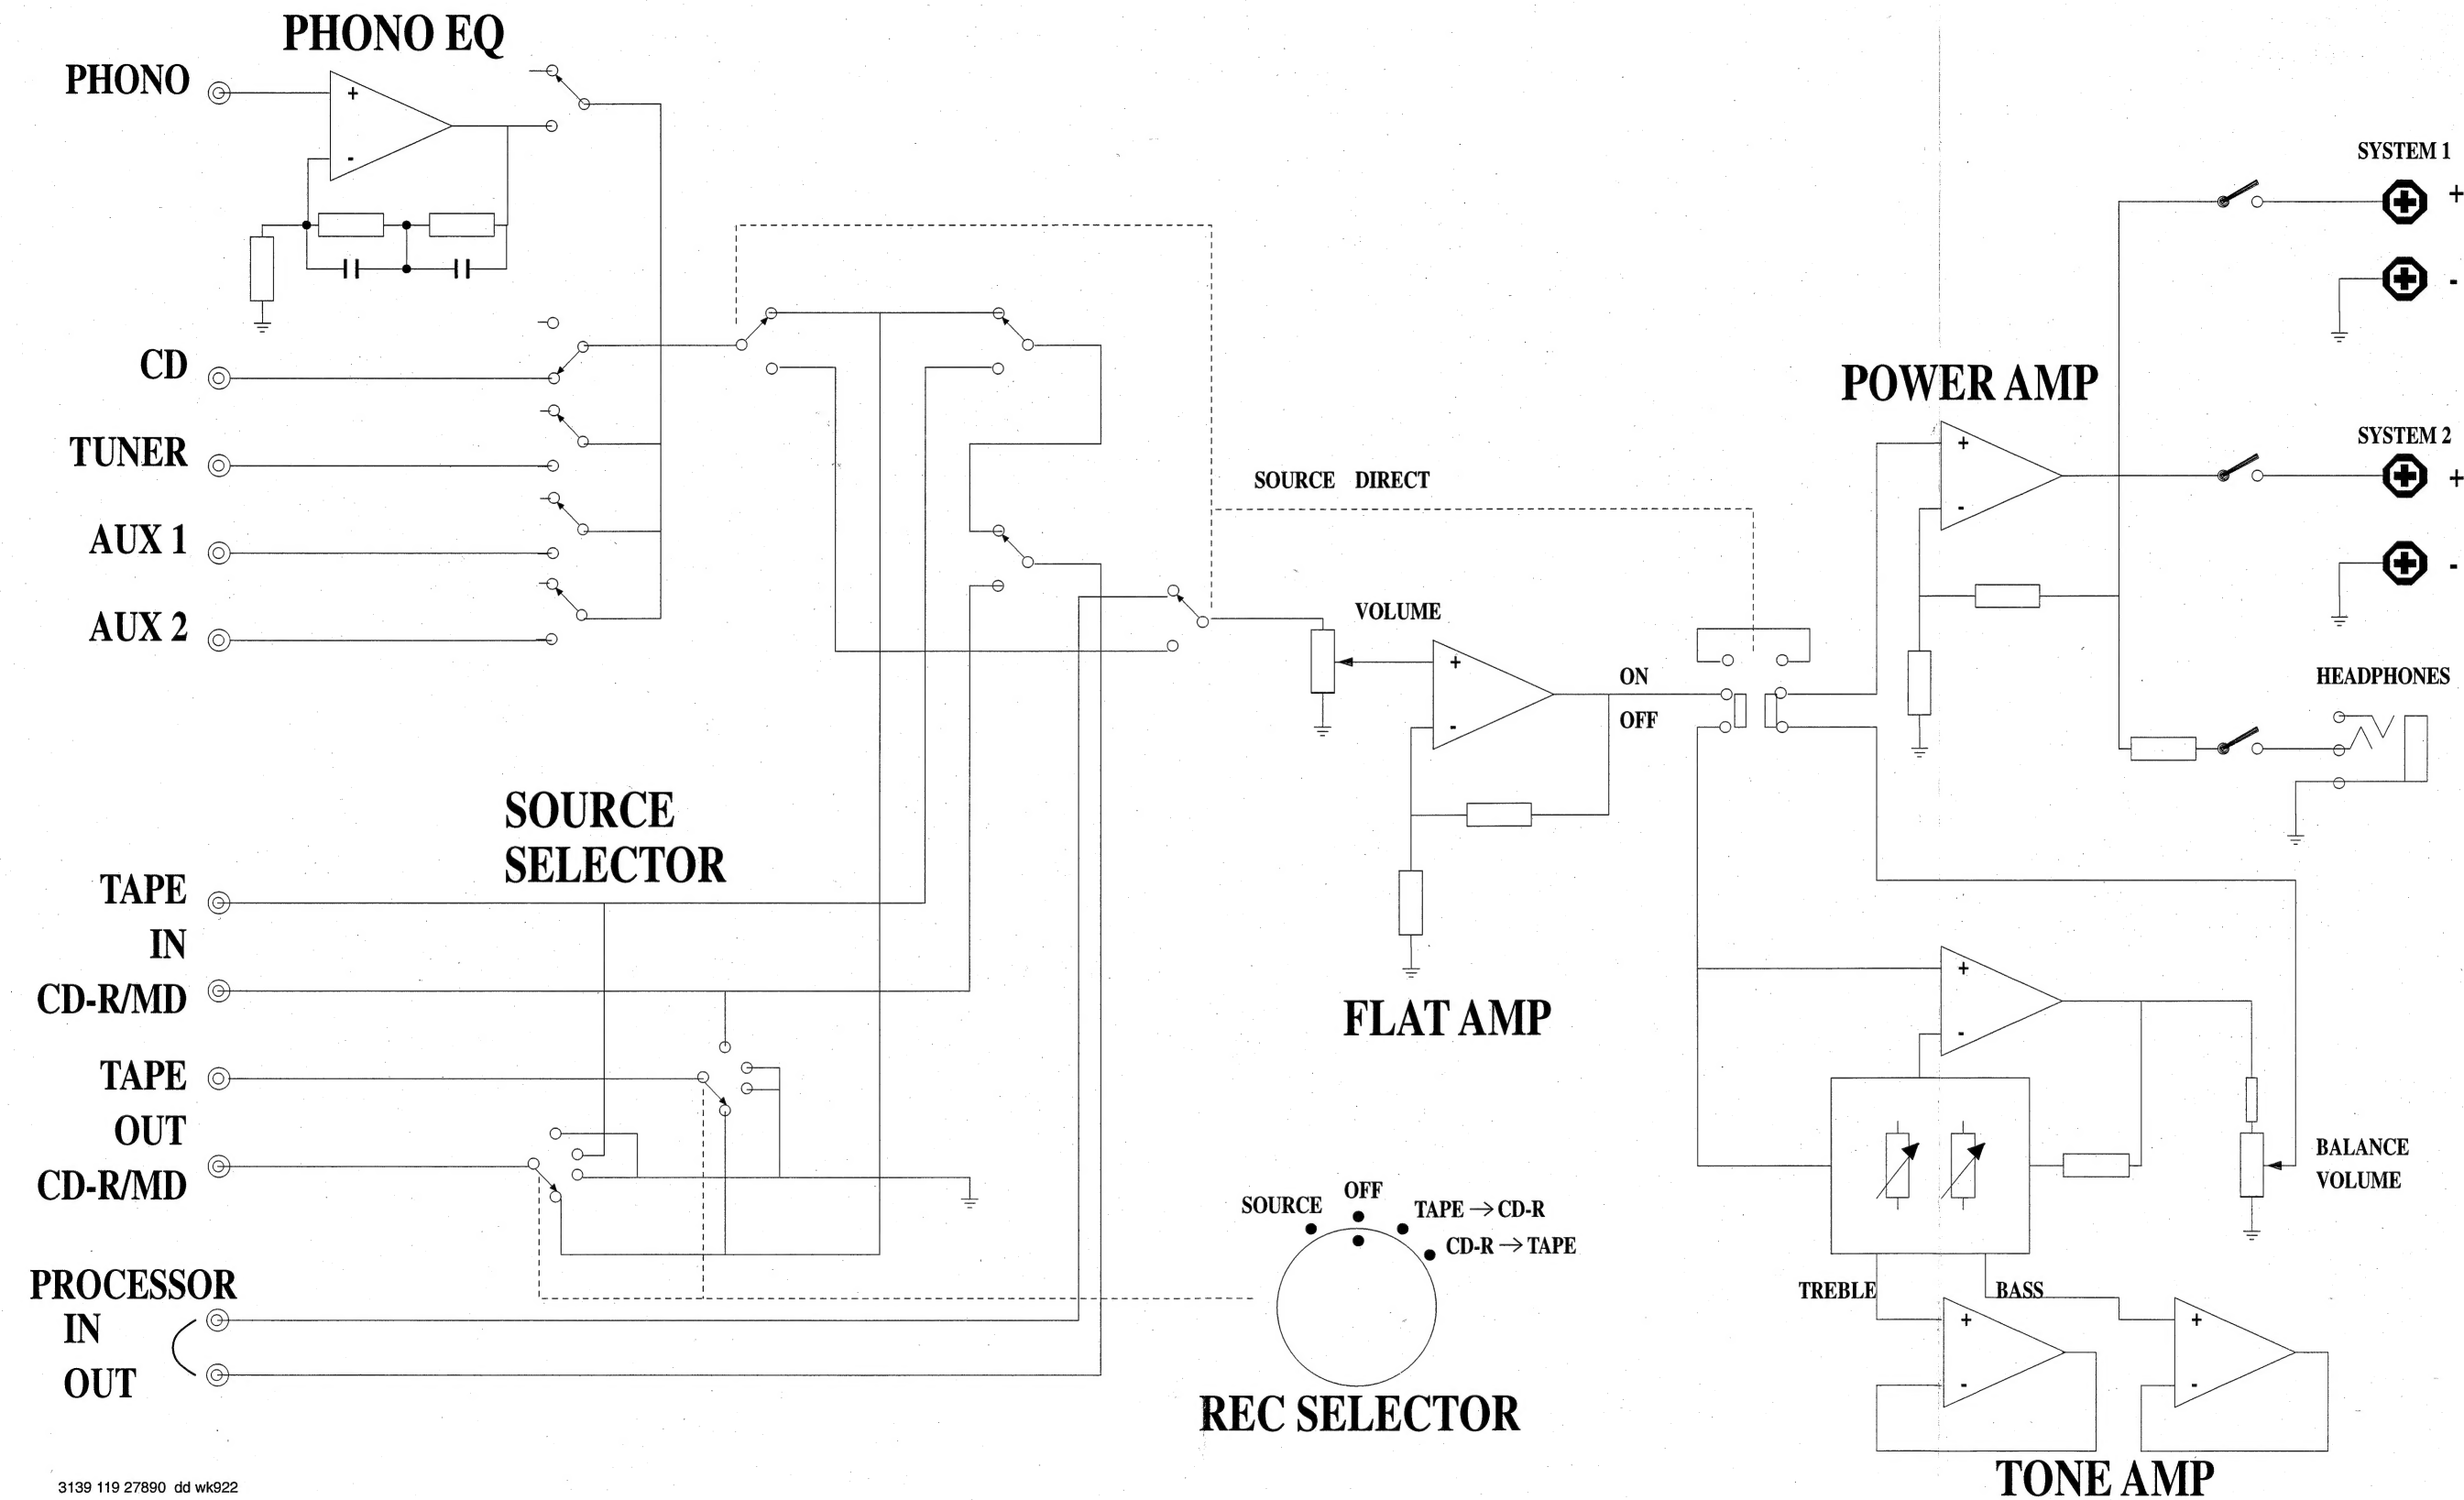


3139 119 27890 dd wk922

5. WIRING DIAGRAM

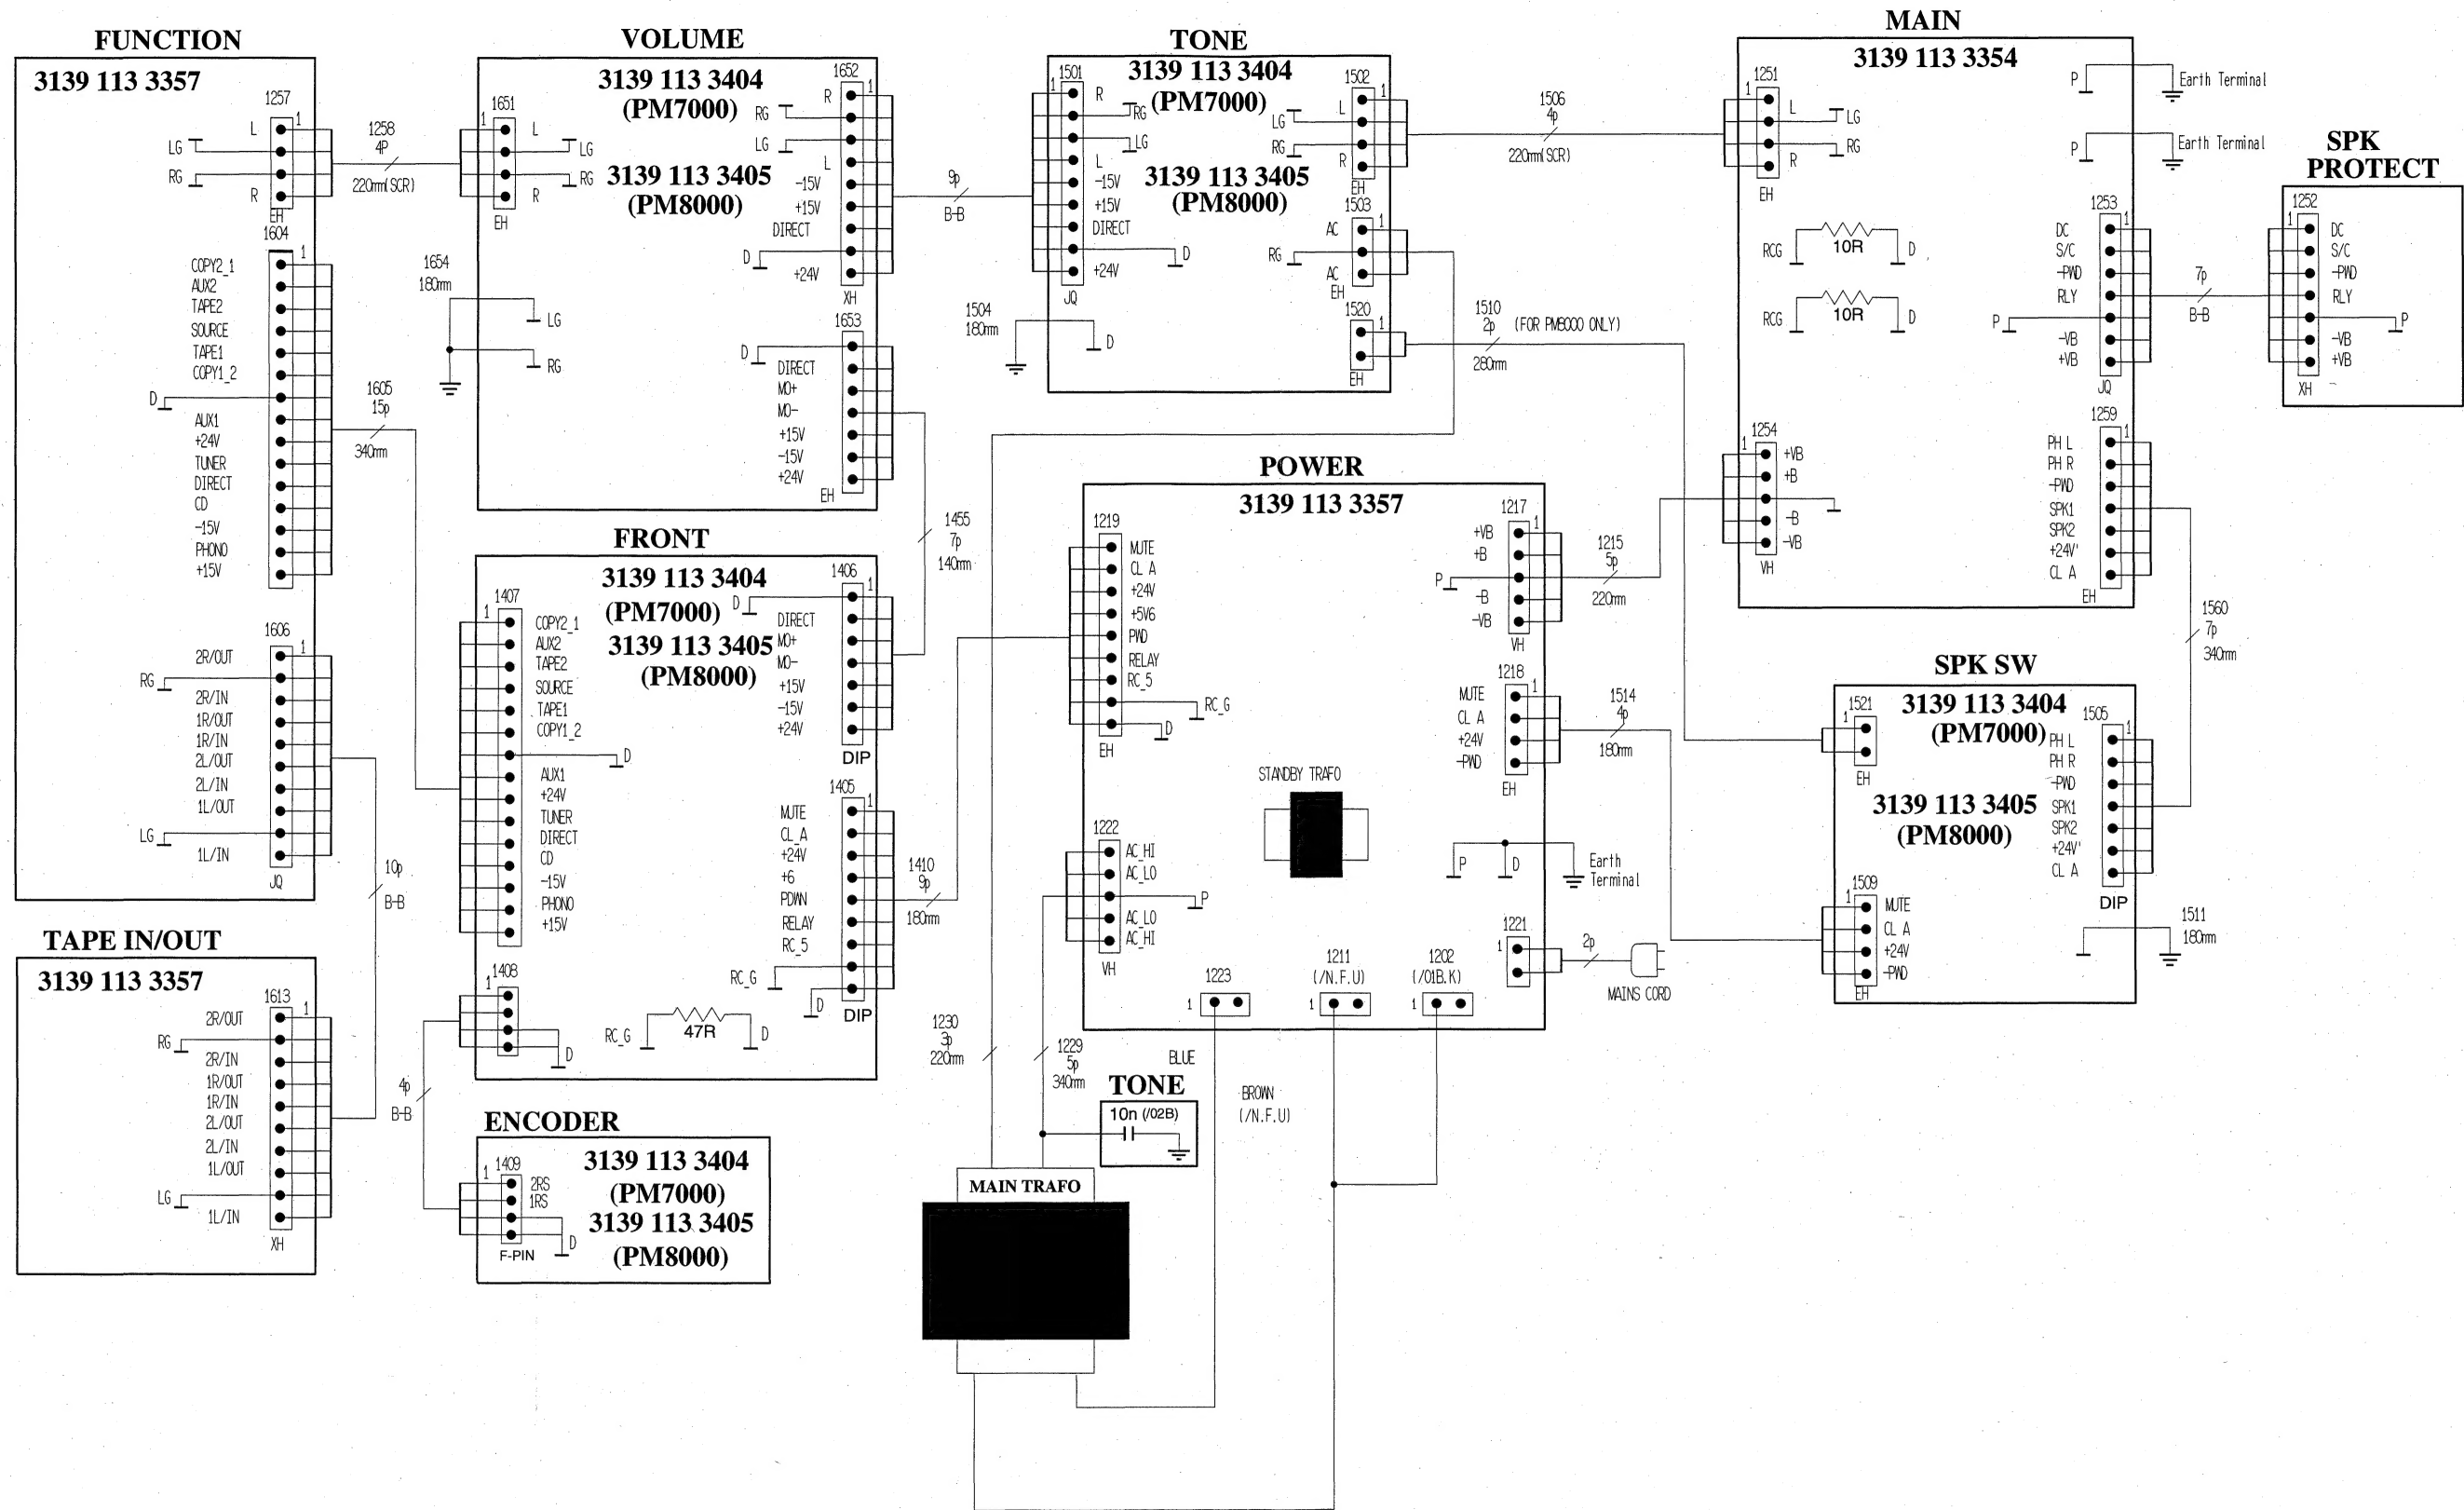


[illegible]

POWER CIRCUIT

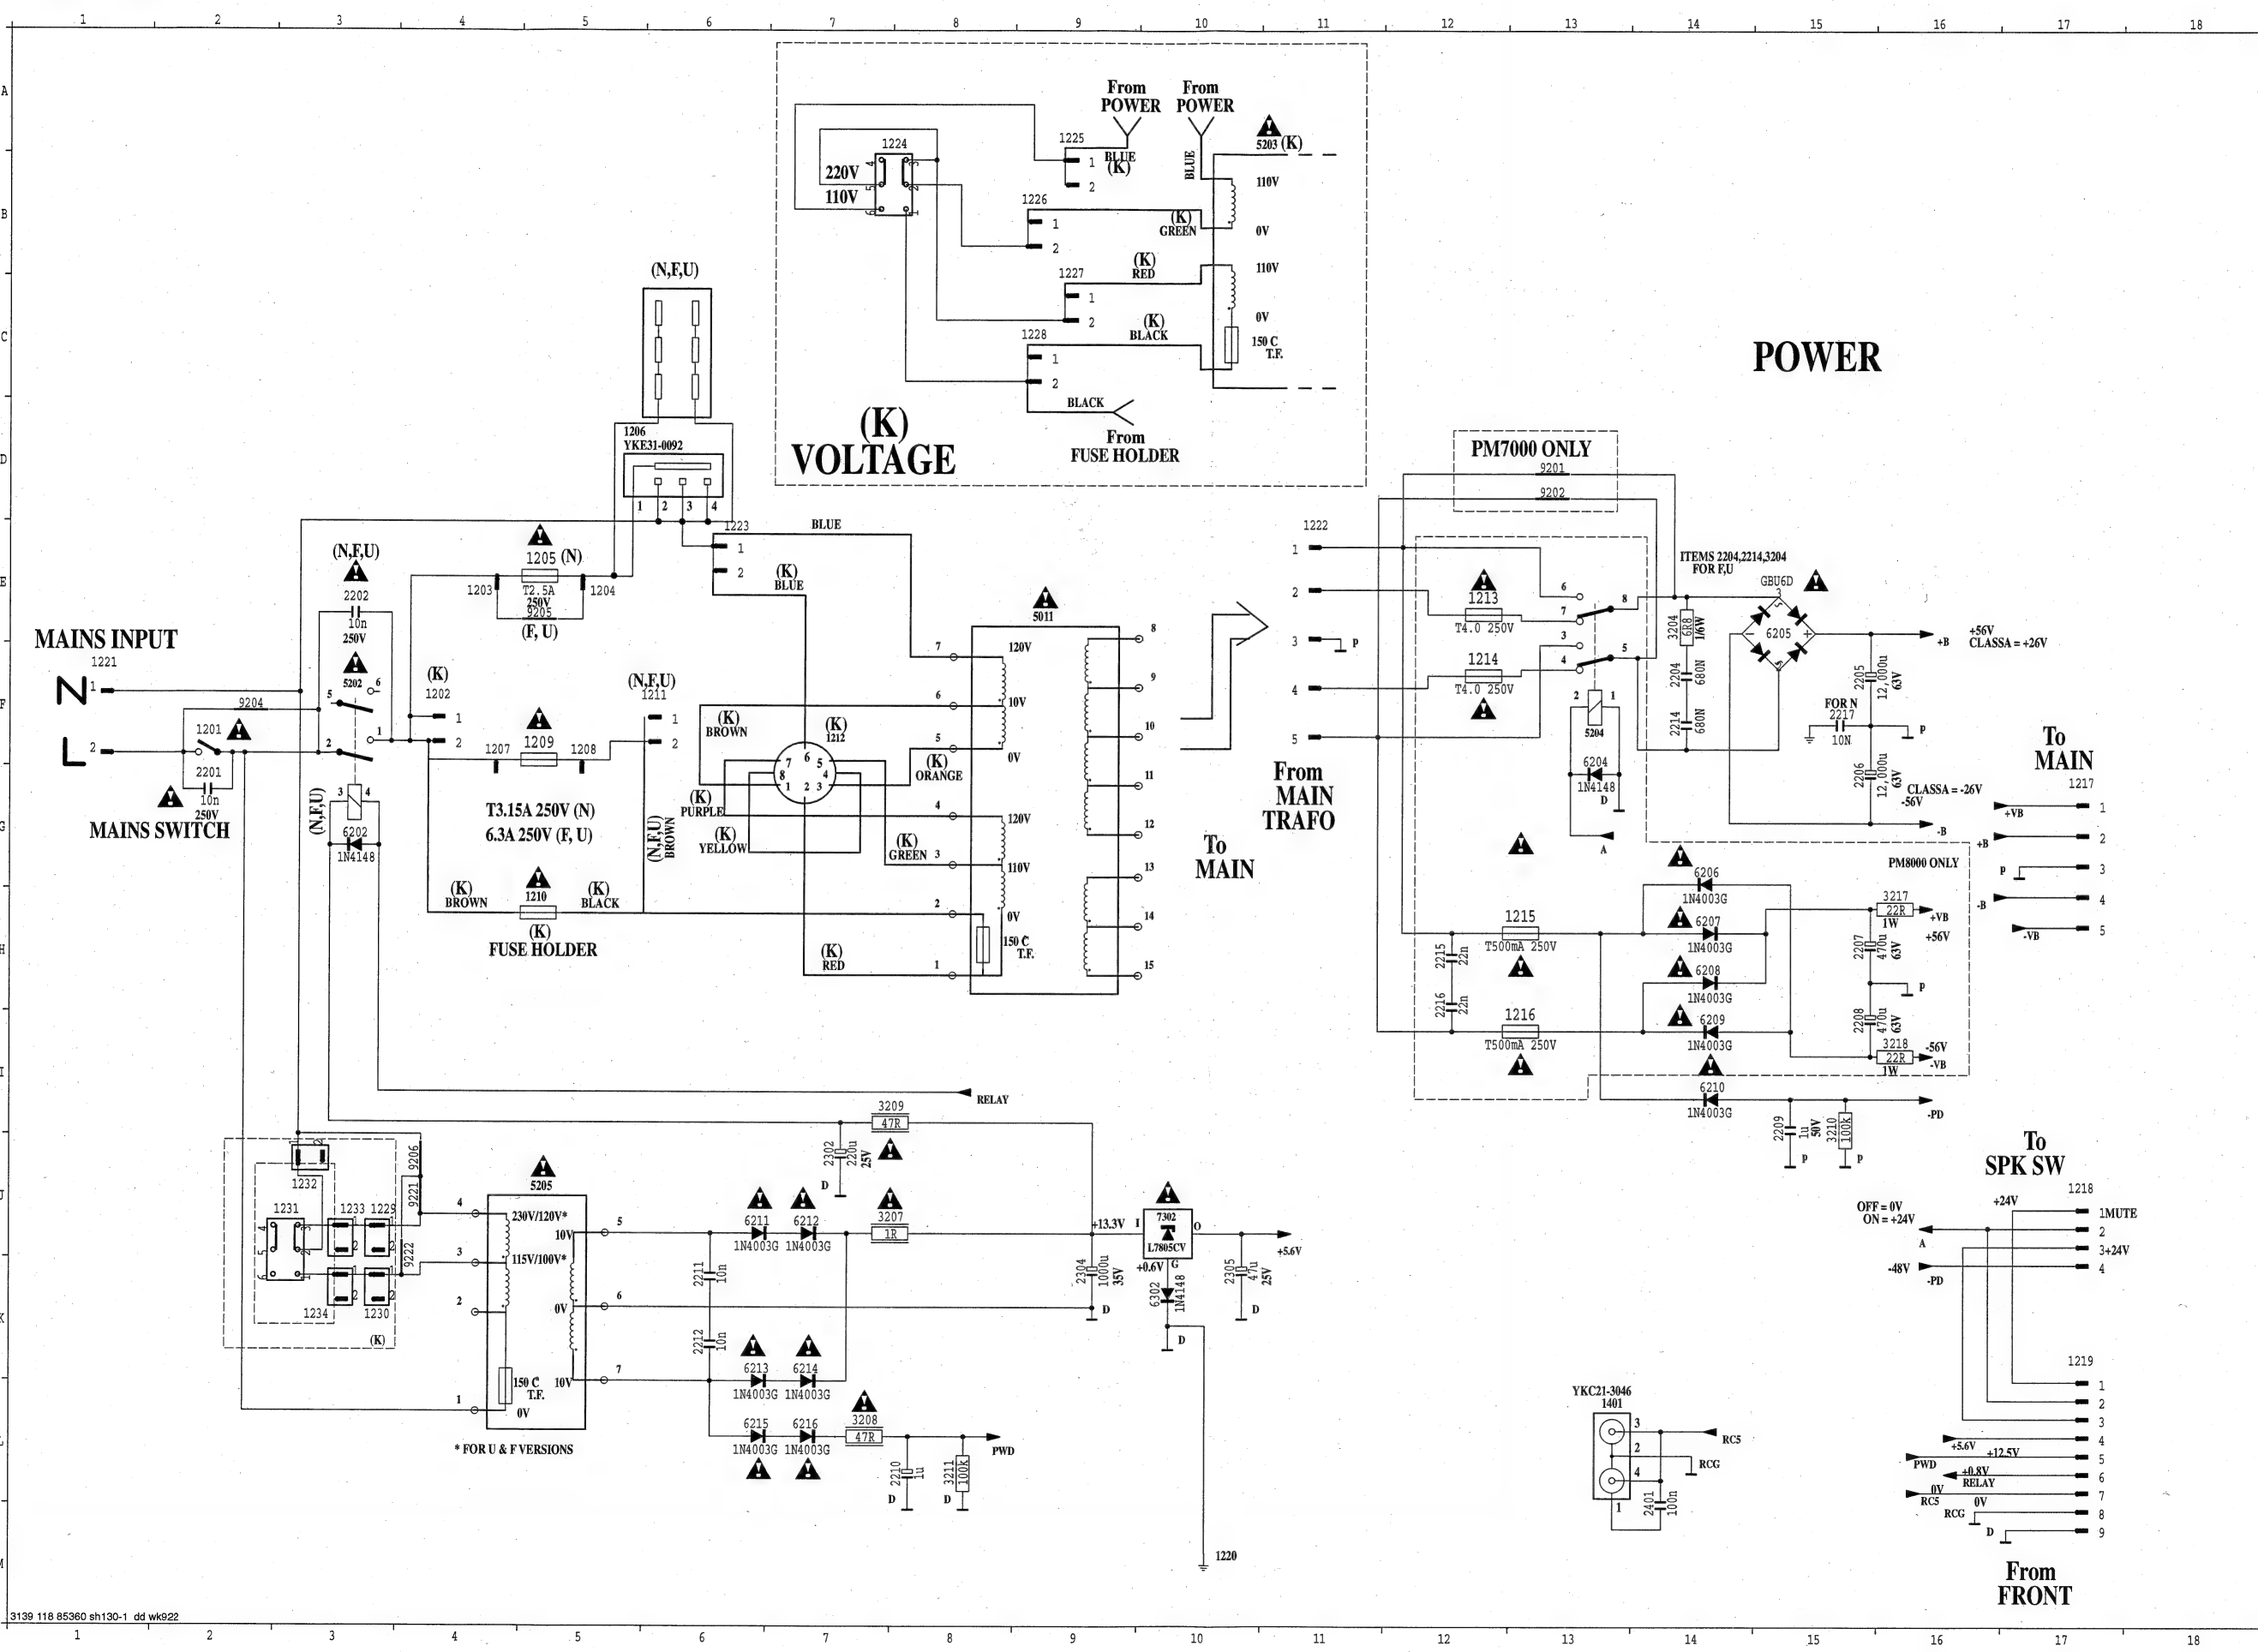


1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
2656
2657
2658
2659
2660
2661
2662
2663
2664
2665
2666
2667
2668
2669
2670
2671
2672
2673
2674
2675
2676
2677
2678
2679
2680
2681
2682
2683
2684
2685
2686
2687
2688
2689
2690
2691
2692
2693
2694
2695
2696
2697
2698
2699
2700
2701
2702
2703
2704
2705
2706
2707
2708
2709
2710
2711
2712
2713
2714
2715
2716
2717
2718
2719
2720
2721
2722
2723
2724
2725
2726
2727
2728
2729
2730
2731
2732
2733
2734
2735
2736
2737
2738
2739
2740
2741
2742
2743
2744
2745
2746
2747
2748
2749
2750
2751
2752
2753
2754
2755
2756
2757
2758
2759
2760
2761
2762
2763
2764
2765
2766
2767
2768
2769
2770
2771
2772
2773
2774
2775
2776
2777
2778
2779
2780
2781
2782
2783
2784
2785
2786
2787
2788
2789
2790
2791
2792
2793
2794
2795
2796
2797
2798
2799
2800
2801
2802
2803
2804
2805
2806
2807
2808
2809
2810
2811
2812
2813
2814
2815
2816
2817
2818
2819
2820
2821
2822
2823
2824
2825
2826
2827
2828
2829
2830
2831
2832
2833
2834
2835
2836
2837
2838
2839
2840
2841
2842
2843
2844
2845
2846
2847
2848
2849
2850
2851
2852
2853
2854
2855
2856
2857
2858
2859
2860
2861
2862
2863
2864
2865
2866
2867
2868
2869
2870
2871
2872
2873
2874
2875
2876
2877
2878
2879
2880
2881
2882
2883
2884
2885
2886
2887
2888
2889
2890
2891
2892
2893
2894
2895
2896
2897
2898
2899
2900
2901
2902
2903
2904
2905
2906
2907
2908
2909
2910
2911
2912
2913
2914
2915
2916
2917
2918
2919
2920
2921
2922
2923
2924
2925
2926
2927
2928
2929
2930
2931
2932
2933
2934
2935
2936
2937
2938
2939
2940
2941
2942
2943
2944
2945
2946
2947
2948
2949
2950
2951
2952
2953
2954
2955
2956
2957
2958
2959
2960
2961
2962
2963
2964
2965
2966
2967
2968
2969
2970
2971
2972
2973
2974
2975
2976
2977
2978
2979
2980
2981
2982
2983
2984
2985
2986
2987
2988
2989
2990
2991
2992
2993
2994
2995
2996
2997
2998
2999
3000
3001
3002
3003
3004
3005
3006
3007
3008
3009
3010
3011
3012
3013
3014
3015
3016
3017
3018
3019
3020
3021
3022
3023
3024
3025
3026
3027
3028
3029
3030
3031
3032
3033
3034
3035
3036
3037
3038
3039
3040
3041
3042
3043
3044
3045
3046
3047
3048
3049
3050
3051
3052
3053
3054
3055
3056
3057
3058
3059
3060
3061
3062
3063
3064
3065
3066
3067
3068
3069
3070
3071
3072
3073
3074
3075
3076
3077
3078
3079
3080
3081
3082
3083
3084
3085
3086
3087
3088
3089
3090
3091
3092
3093
3094
3095
3096
3097
3098
3099
3100
3101
3102
3103
3104
3105
3106
3107
3108
3109
3110
3111
3112
3113
3114
3115
3116
3117
3118
3119
3120
3121
3122
3123
3124
3125
3126
3127
3128
3129
3130
3131
3132
3133
3134
3135
3136
3137
3138
3139
3140
3141
3142
3143
3144
3145
3146
3147
3148
3149
3150
3151
3152
3153
3154
3155
3156
3157
3158
3159
3160
3161
3162
3163
3164
3165
3166
3167
3168
3169
3170
3171
3172
3173
3174
3175
3176
3177
3178
3179
3180
31

FRONT CIRCUIT

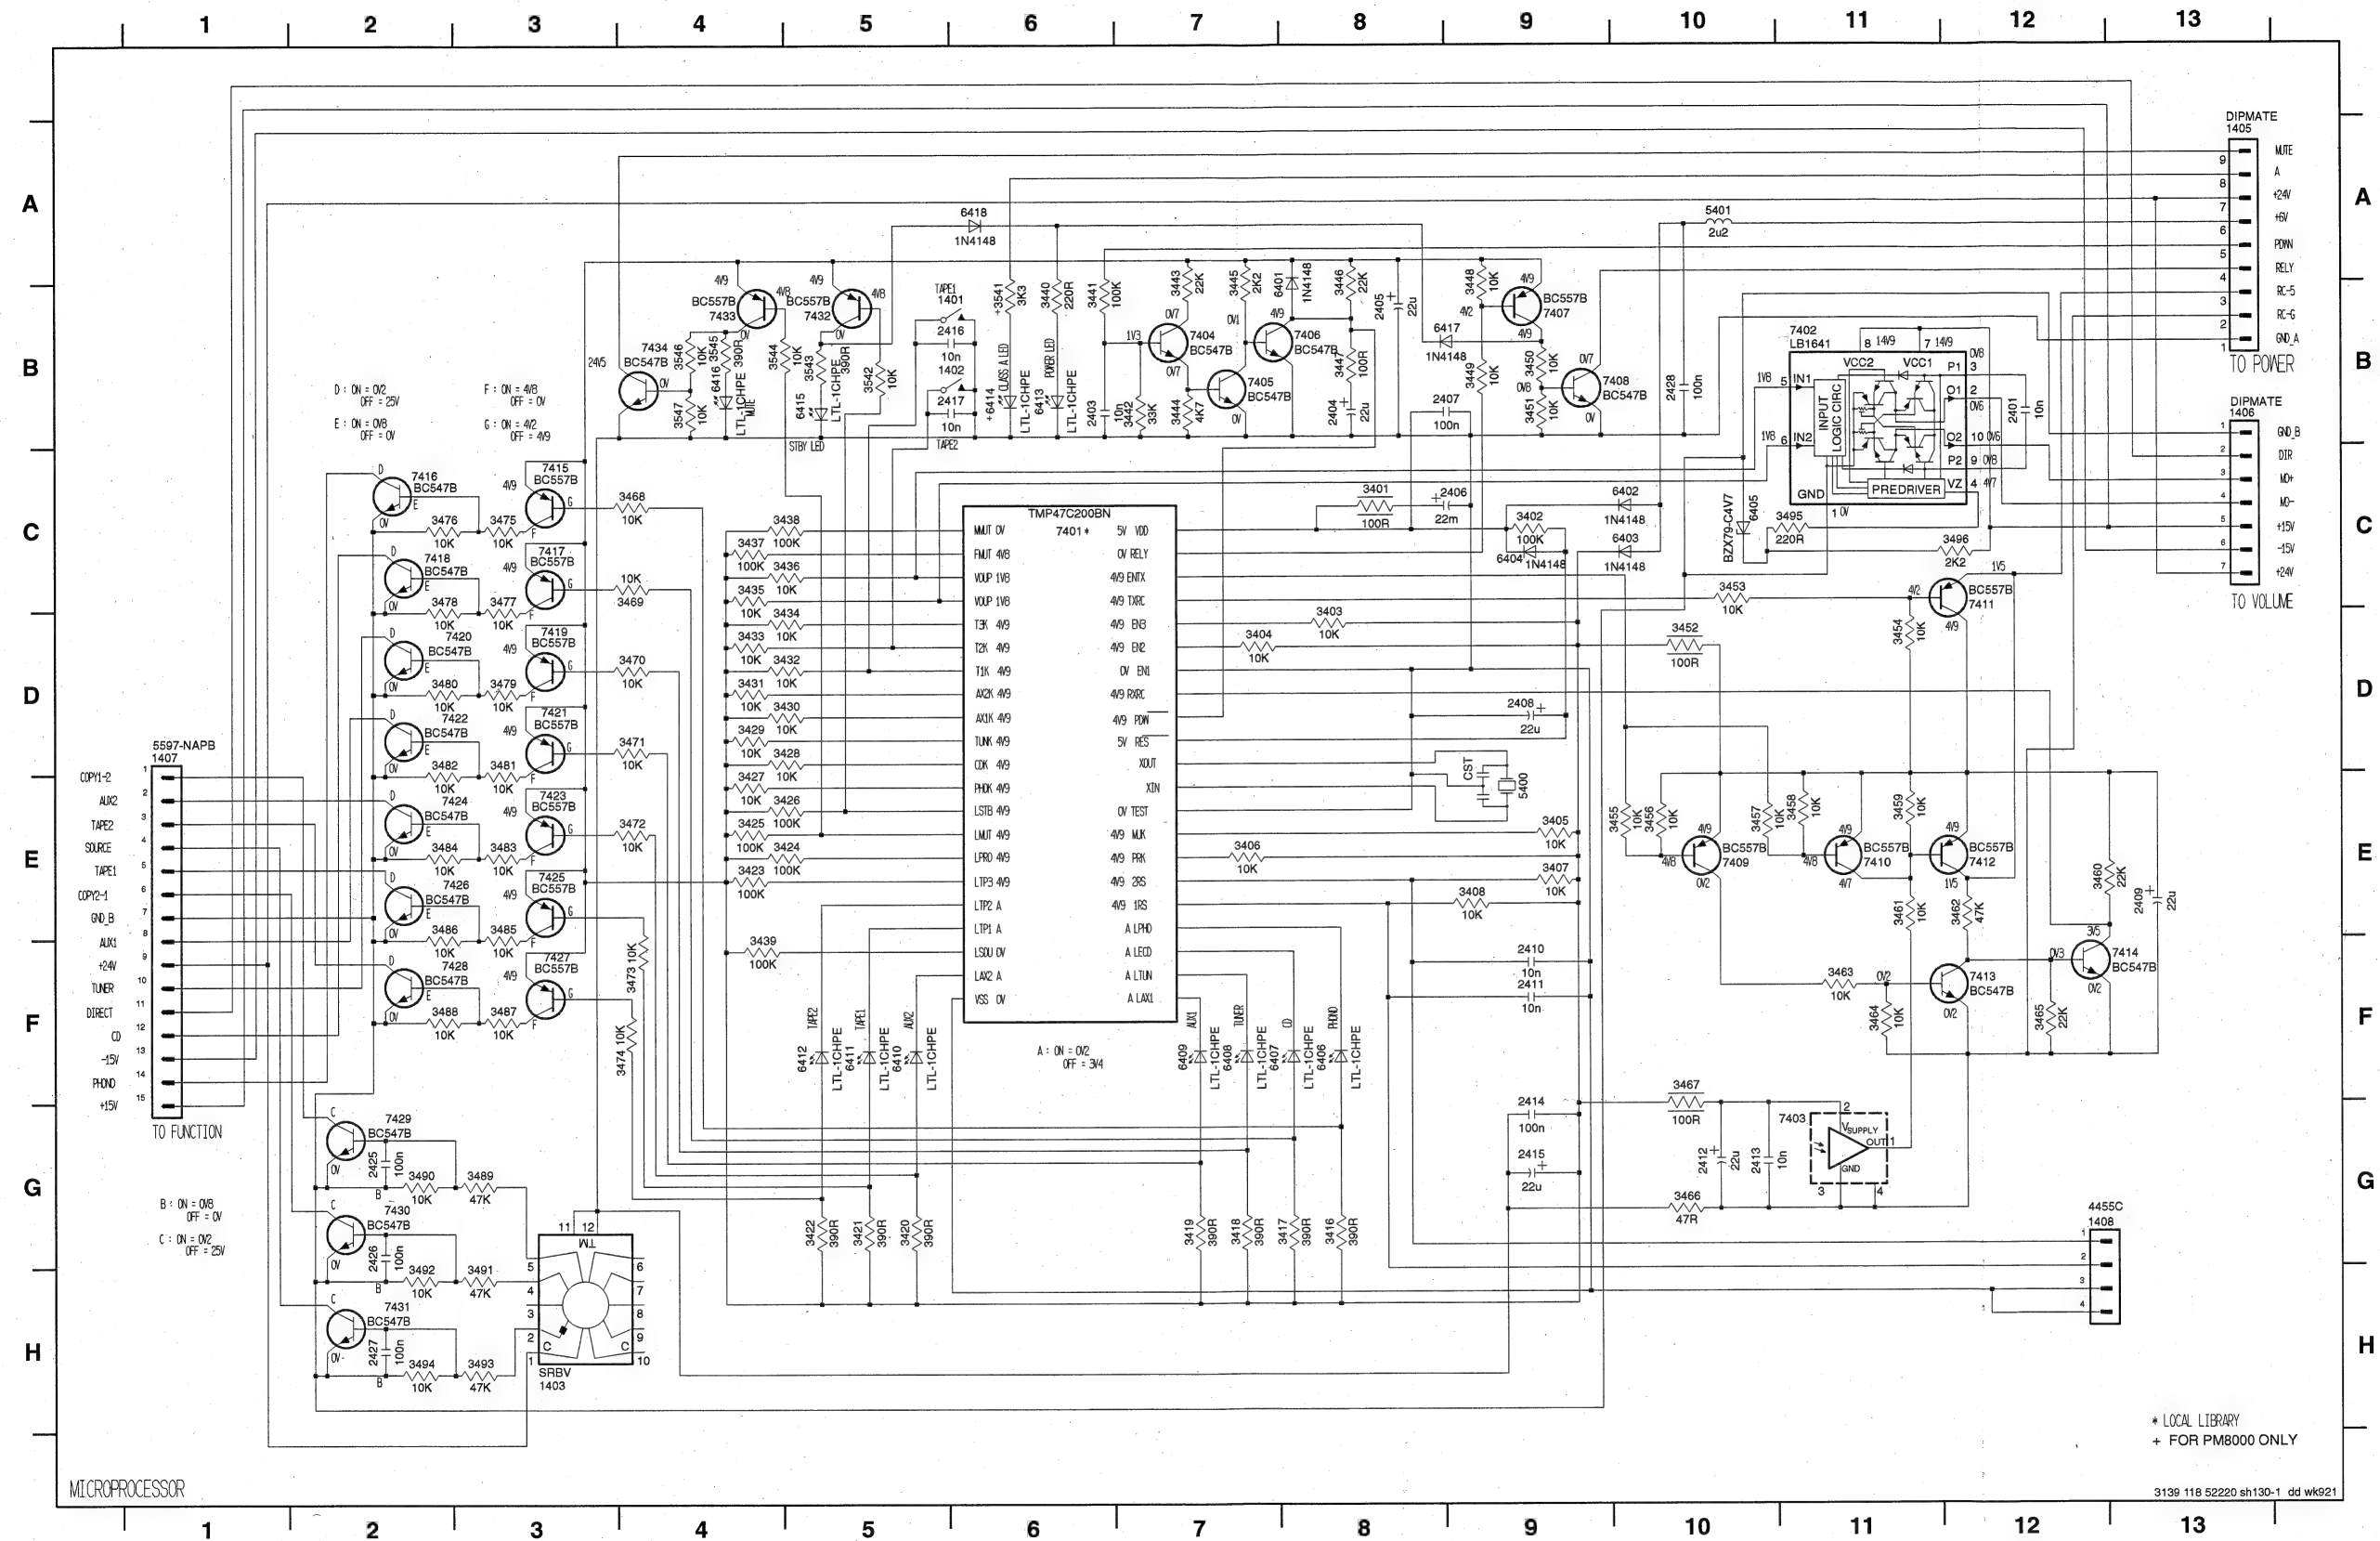


1401 B6	3487 F3
1402 B6	3488 F2
1403 H3	3489 G3
1405 A13	3490 G2
1406 B13	3491 H3
1407 D1	3492 H2
1408 G12	3493 H3
2401 B12	3494 H2
2403 B6	3495 C11
2404 B8	3496 C12
2405 B8	3541 B6
2406 C9	3542 B5
2407 B9	3543 B5
2408 D9	3544 B4
2409 E13	3545 B4
2410 F9	3546 B4
2411 F9	3547 B4
2412 G10	5400 E9
2413 G10	5401 A10
2414 G9	6401 B8
2415 G9	6402 C10
2416 B6	6403 C10
2417 B6	6404 C9
2425 G2	6405 C10
2426 G2	6406 F8
2427 H2	6407 F7
2428 B10	6408 F7
3401 C8	6409 F7
3402 C9	6410 F5
3403 D8	6411 F5
3404 D7	6412 F5
3405 E9	6413 B6
3406 E7	6414 B6
3407 E9	6415 B5
3408 E9	6416 B4
3416 G8	6417 B9
3417 G8	6418 A6
3418 G7	7401 C6
3419 G7	7402 B11
3420 G5	7403 G11
3421 G5	7404 B7
3422 G5	7405 B7
3423 E4	7406 B8
3424 E5	7407 B9
3425 E4	7408 B9
3426 E5	7409 E10
3427 E4	7410 E11
3428 D5	7411 C12
3429 D4	7412 E12
3430 D5	7413 F12
3431 D4	7414 F13
3432 D5	7415 C3
3433 D4	7416 C2
3434 D5	7417 C3
3435 C4	7418 C2
3436 C5	7419 D3
3437 C4	7420 D3
3438 C5	7421 D3
3439 F4	7422 D3
3440 B6	7423 E3
3441 B6	7424 E3
3442 B7	7425 E3
3443 B7	7426 E3
3444 B7	7427 F3
3445 B7	7428 F3
3446 B8	7429 G2
3447 B8	7430 G2
3448 B9	7431 H2
3449 B9	7432 B5
3450 B9	7433 B4
3451 B9	7434 B4
3452 D10	
3453 C10	
3454 D11	
3455 E10	
3456 E10	
3457 E10	
3458 E11	
3459 E11	
3460 E12	
3461 E11	
3462 E12	
3463 F11	
3464 F11	
3465 F12	
3466 G10	
3467 F10	
3468 C4	
3469 C4	
3470 D4	
3471 D4	
3472 E4	
3473 F4	
3474 F3	
3475 C3	
3476 C2	
3477 C3	
3478 C2	
3479 D3	
3480 D2	
3481 D3	
3482 D2	
3483 E3	
3484 E2	
3485 E3	
3486 E2	

1251 E 1	1258 E21	1254 H 3	1262 H 7	1270 H7	1278 K15	1283 P 2	1291 B 3	1299 A 4	1307 C 6	1315 E 6	1323 A 7	1331 C 8	1339 B10	1347 C12	1355 C13	1363 C14	1371 C16	1379 K16	1387 F18	1395 D 5	1403 A 6	1411 B10	1419 F18	1427 I 4	1435 I 7	1443 I10	1451 H13	1459 H15
1252 J19	1259 J19	1265 H 4	1273 H7	1281 H7	1289 K15	1295 P 3	1303 B 3	1311 A 4	1319 E 6	1327 A 7	1335 C 8	1343 B10	1351 C12	1359 C13	1367 C14	1375 C16	1383 K16	1391 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	
1253 J20	1259 J21	1266 J 8	1274 J8	1282 J8	1290 K15	1296 P 3	1304 B 3	1312 A 4	1320 E 6	1328 A 7	1336 C 8	1344 B10	1352 C12	1360 C13	1368 C14	1376 C16	1384 K16	1392 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	
1254 F21	1261 C21	1267 E 5	1275 E19	1283 E19	1291 K16	1297 P 2	1305 B 3	1313 A 4	1321 E 6	1329 A 7	1337 C 8	1345 B10	1353 C12	1361 C13	1369 C14	1377 C16	1385 K16	1393 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	
1255 C20	1262 E21	1268 E 5	1276 E19	1284 E19	1292 K17	1298 P 3	1306 B 3	1314 A 4	1322 E 6	1330 A 7	1338 C 8	1346 B10	1354 C12	1362 C13	1370 C14	1378 C16	1386 K16	1394 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	
1256 E20	1263 E21	1269 E 6	1277 C9	1285 C15	1293 A15	1299 P 3	1307 B 3	1315 A 4	1323 E 6	1331 A 7	1339 C 8	1347 B10	1355 C12	1363 C13	1371 C14	1379 C16	1387 K16	1395 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	
1257 D20	1264 E21	1270 E 6	1278 E19	1286 E19	1294 K17	1300 P 3	1308 B 3	1316 A 4	1324 E 6	1332 A 7	1340 C 8	1348 B10	1356 C12	1364 C13	1372 C14	1380 C16	1388 K16	1396 F18	1399 D 5	1407 A 6	1415 B10	1423 F18	1431 I 4	1439 I 7	1447 I10	1455 H13	1463 H15	




TONE CIRCUIT

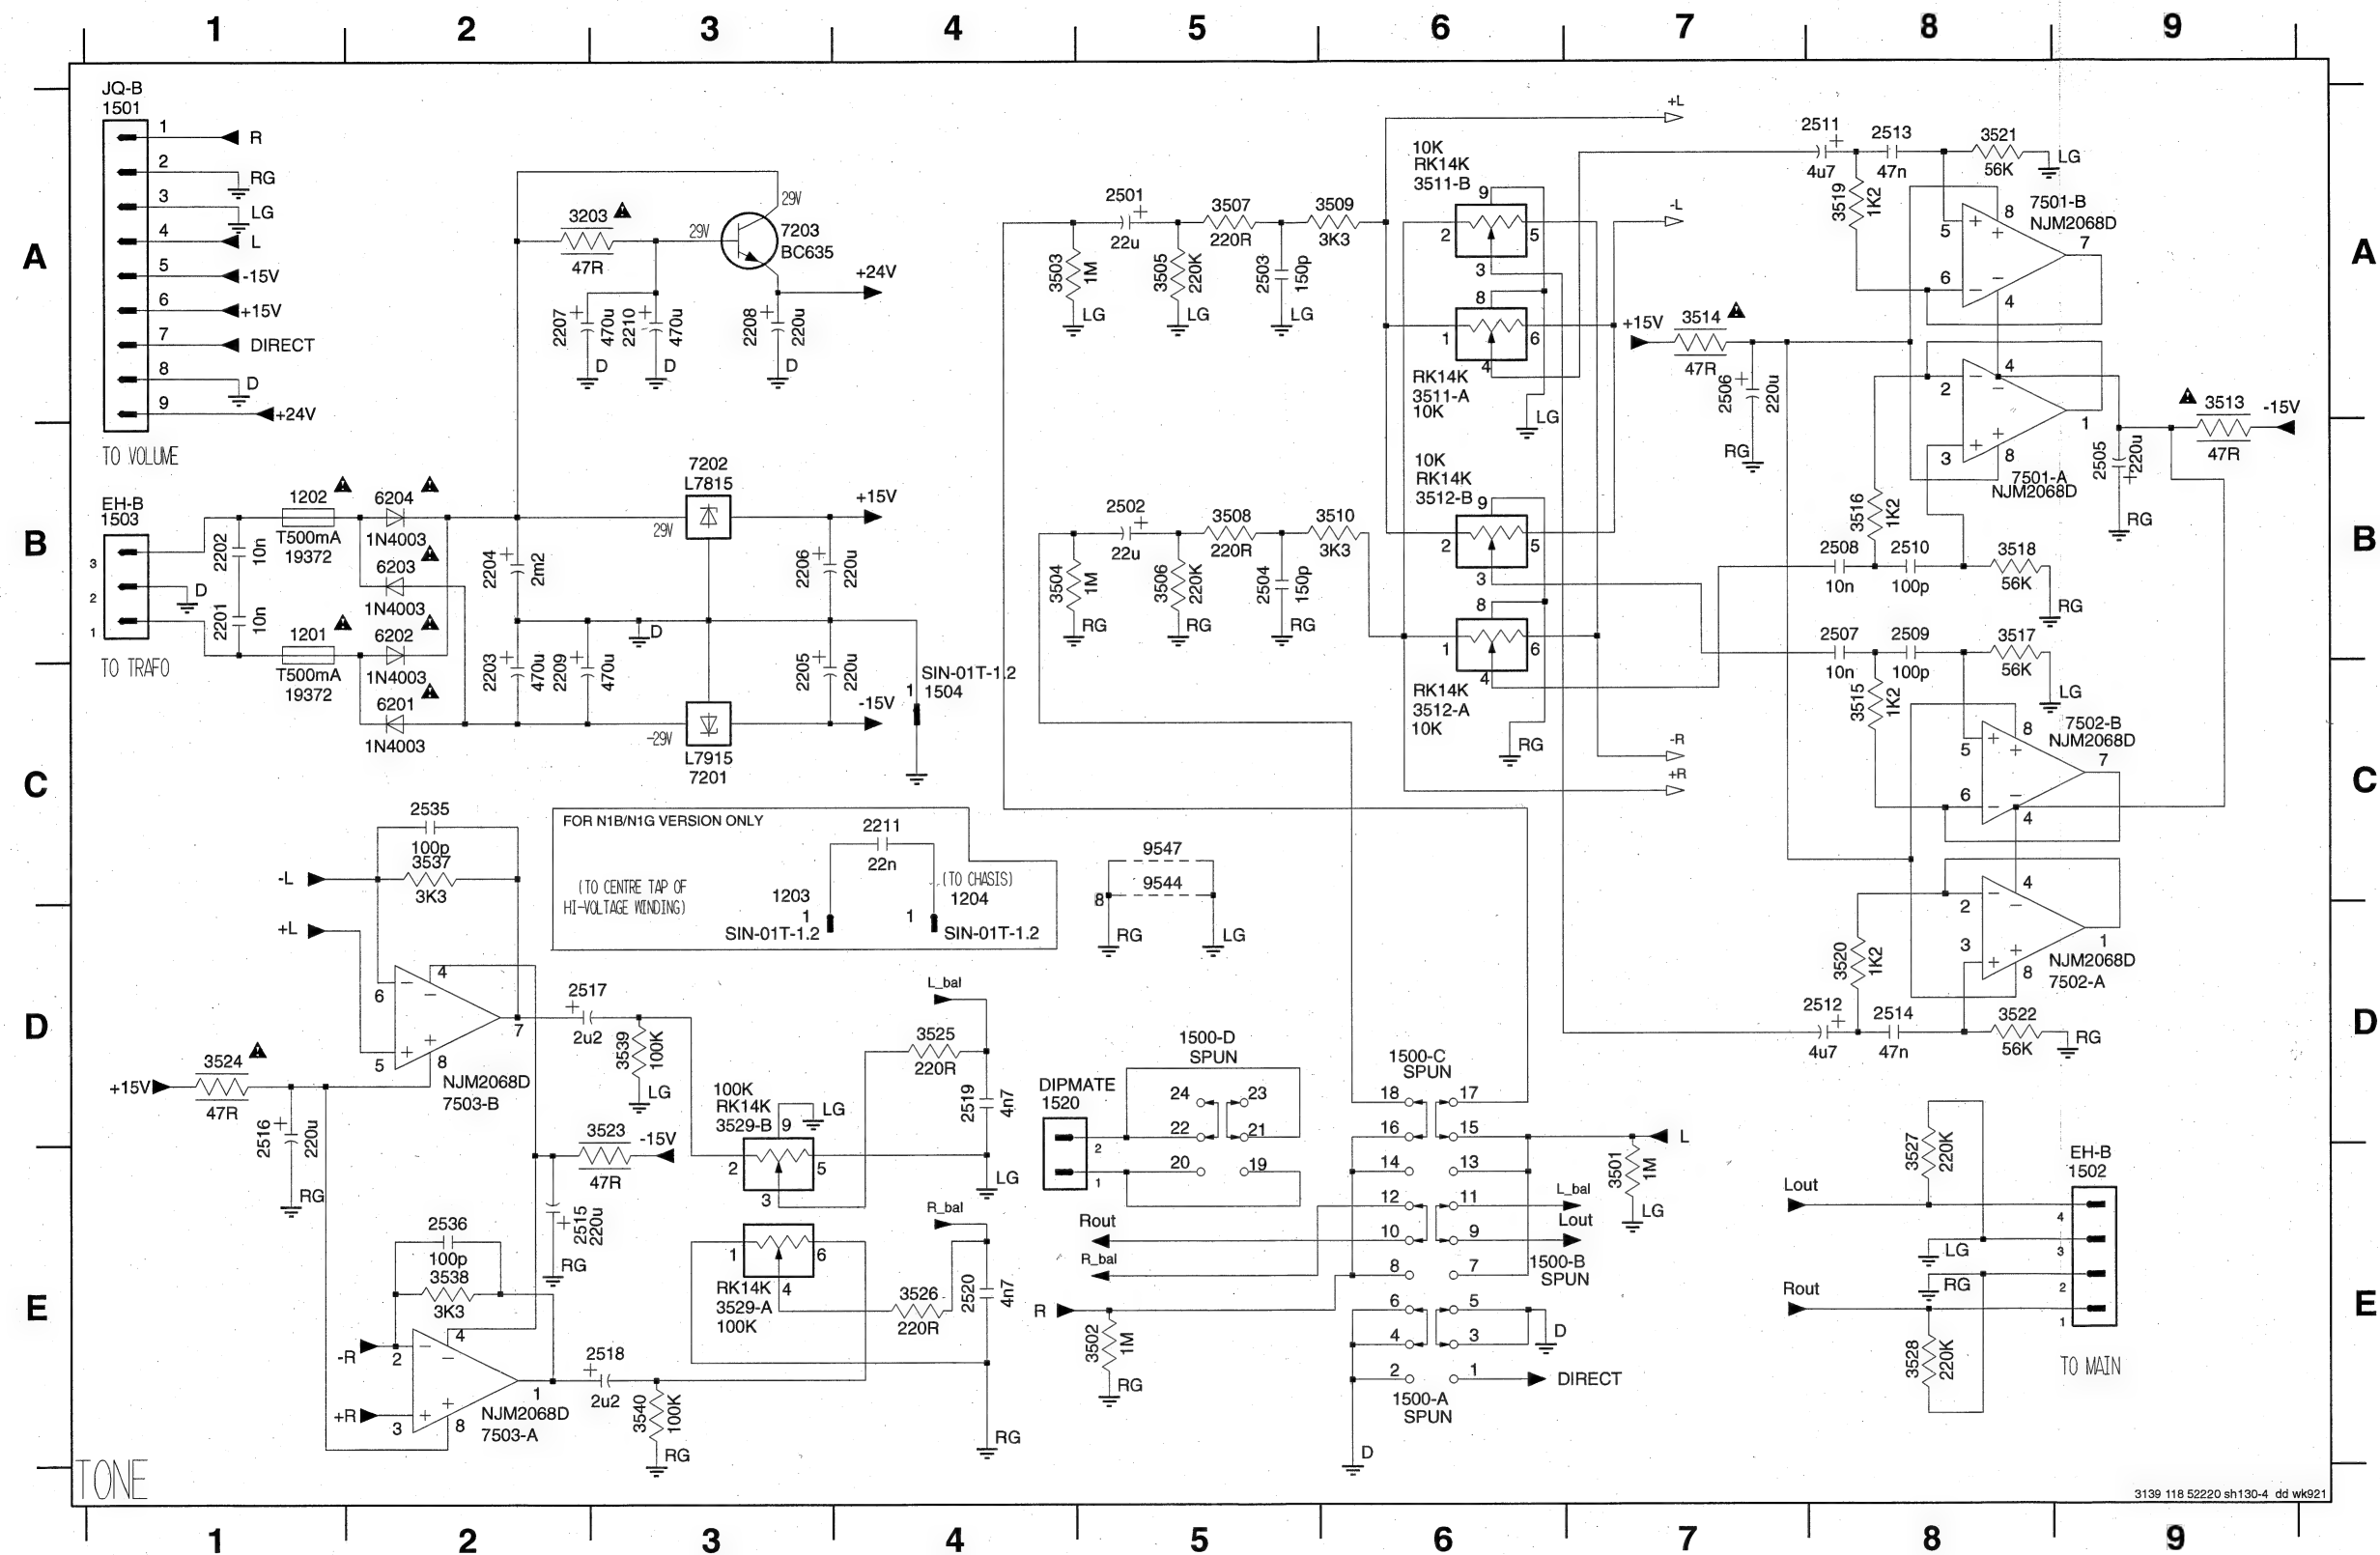


1201 B1	3524 D1
1202 B3	3525 D4
1203 C3	3526 E4
1204 C4	3527 E8
1500-A E6	3528 E8
1500-B E7	3529-A E3
1500-C D6	3529-B D3
1500-D D5	3537 C2
1501 A1	3538 E2
1502 E9	3539 D3
1503 B1	3540 E3
1504 C4	6201 C2
1520 D5	6202 B2
2201 B1	6203 B2
2202 B1	6204 B2
2203 C2	7201 C3
2204 B2	7202 B3
2205 C3	7203 A3
2206 B3	7501-A B8
2207 A2	7501-B A8
2208 A3	7502-A D8
2209 C2	7502-B C9
2210 A3	7503-A E2
2211 C4	7503-B D2
2501 A5	9544 C5
2502 B5	9547 C5
2503 A5	
2504 B5	
2505 B9	
2506 A7	
2507 B8	
2508 B8	
2509 B8	
2510 B8	
2511 A8	
2512 D8	
2513 A8	
2514 D8	
2515 E2	
2516 D1	
2517 D2	
2518 E3	
2519 D4	
2520 E4	
2535 C2	
2536 E2	
3203 A2	
3501 E7	
3502 E5	
3503 A4	
3504 B4	
3505 A5	
3506 B5	
3507 A5	
3508 B5	
3509 A6	
3510 B6	
3511-A A6	
3511-B A6	
3512-A C6	
3512-B B6	
3513 A9	
3514 A7	
3515 C8	
3516 B8	
3517 B8	
3518 B8	
3519 A8	
3520 D8	
3521 A8	
3522 D8	
3523 D3	

1505 A1	1509 C4	1521 E4	3530 E2	3533 A2	6529 D1	9508 C2
1507-A B2	1510 A3	2533 A2	3531 E2	3534 A2	7529 D2	
1507-B B3	1511 E2	2534 A2	3532 D3	3535 D2	7530 D2	




	1	2	3	
1404 A3				
1409 A1				
3497 A2				
3498 A2				




VOLUME CONTROL CIRCUIT (PM7000)

1651 B1	1655 D1	2654 D3	2658 C4	2662 D6	2666 C6	2670 C4	3653 A2	3657 B3	3661 A3	3665 B4	3669 B5	3673 B6	3681-A C2	7651 B3	7655-A D5
1652 B8	2651 A1	2655 B3	2659 A4	2663 B7	2667 A1	2671 A1	3654 D2	3658 C3	3662 D3	3666 D4	3670 D5	3674 D6	3681-B C2	7652 D3	7655-B B5
1653 A8	2652 D2	2656 D3	2660 D4	2664 D7	2668 A2	3651 B2	3655 B3	3659 A3	3663 B4	3667 C4	3671 B6	3675 A7	3681-C C2	7653 B4	
1654 D1	2653 B3	2657 B4	2661 B6	2665 C6	2669 B4	3652 D2	3656 D3	3660 D3	3664 D4	3668 C4	3672 D6	3676 A7	3681-D B1	7654 D4	

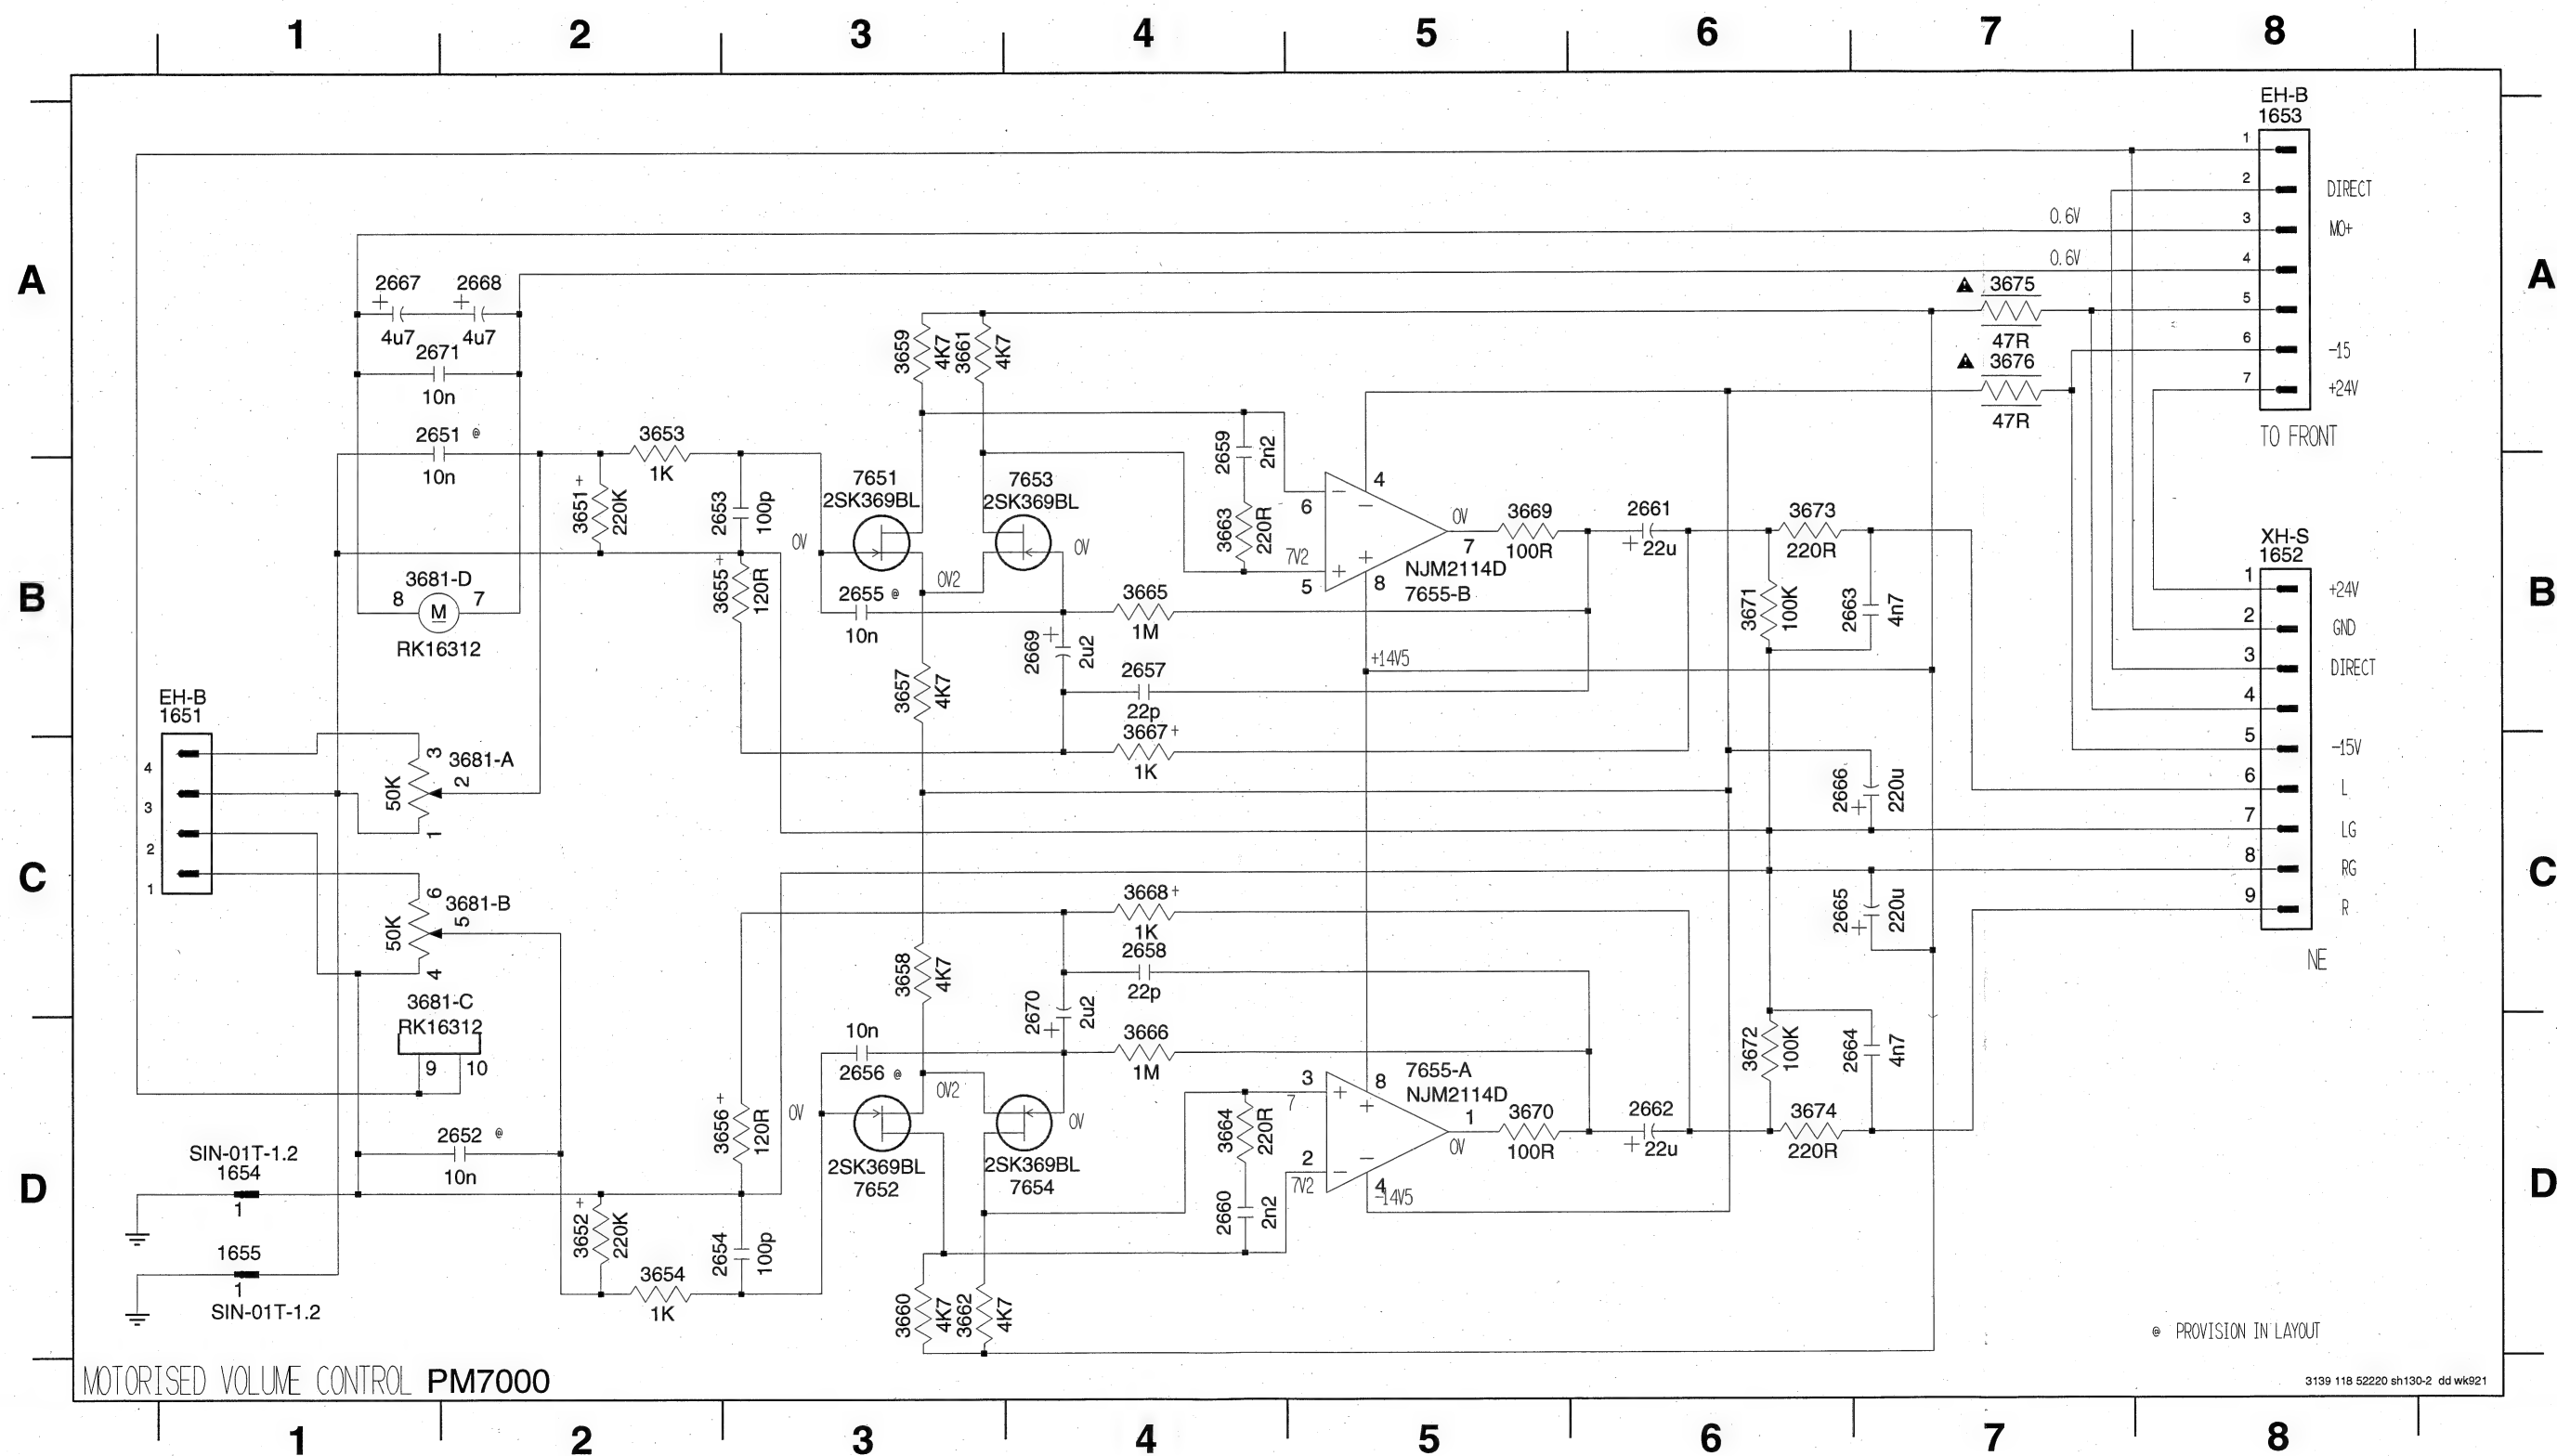

VOLUME CONTROL CIRCUIT (PM8000)

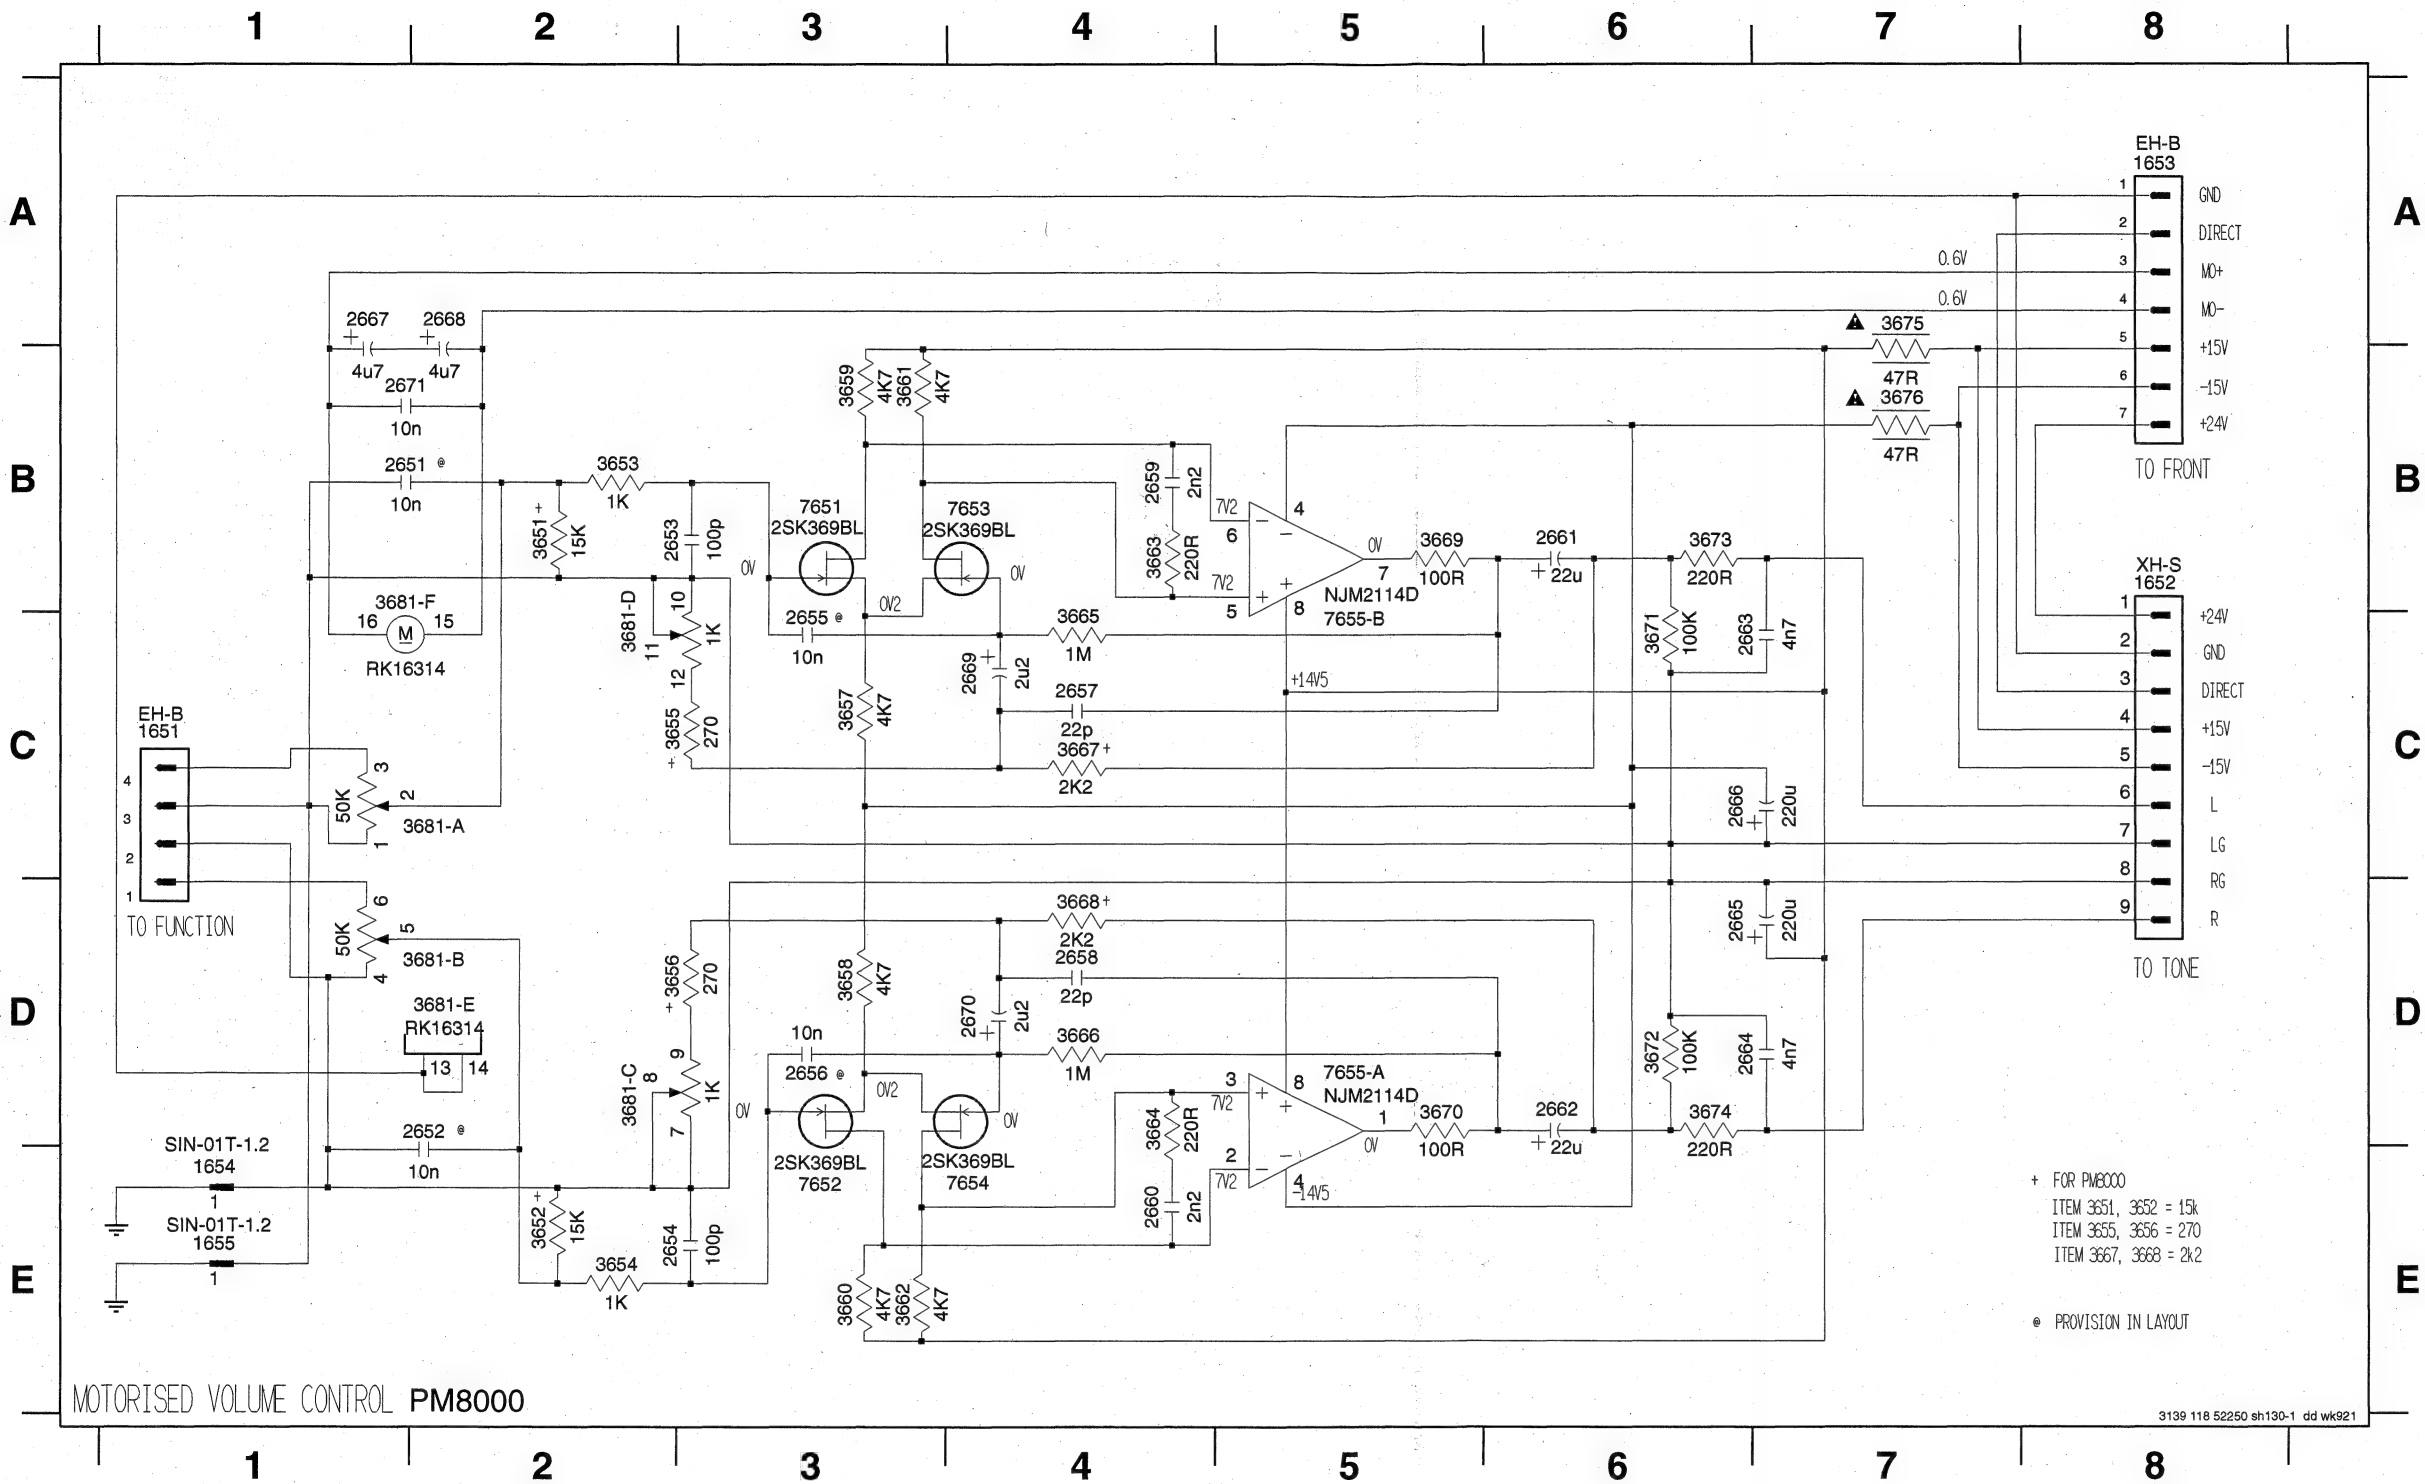


1651 C1	7655-A D5
1652 B8	7655-B B5
1653 A8	T117 C1
1654 E1	T118 C1
1655 E1	T119 C1
2651 B1	T120 C1
2652 D2	T121 A8
2653 B2	T122 A8
2654 E2	T123 A8
2655 C3	T124 A8
2656 D3	T125 A8
2657 C4	T126 B8
2658 D4	T127 B8
2659 B4	T128 B8
2660 E4	T129 C8
2661 B6	T130 C8
2662 D6	T131 C8
2663 C6	T132 C8
2664 D6	T133 C8
2665 D6	T134 C8
2666 C6	T135 C8
2667 A1	T136 D8
2668 A2	
2669 C4	
2670 D4	
2671 B1	
3651 B2	
3652 E2	
3653 B2	
3654 E2	
3655 C3	
3656 D3	
3657 C3	
3658 D3	
3659 B3	
3660 E3	
3661 B3	
3662 E3	
3663 B4	
3664 D4	
3665 C4	
3666 D4	
3667 C4	
3668 D4	
3669 B5	
3670 D5	
3671 C6	
3672 D6	
3673 B6	
3674 D6	
3675 A7	
3676 B7	
3681-A C1	
3681-B D1	
3681-C D2	
3681-D C2	
3681-E D2	
3681-F B1	
7651 B3	
7652 E3	
7653 B4	
7654 E4	


This assembly drawing shows a summary of all possible versions. For components used in a specific version see schematic diagram and respective parts list

1257	B	6	3562	C	3	9624	B	3	1232	A	8
1551	C	1	3563	C	4	9625	B	3	1233	A	8
1601	B	1	3564	C	4	9626	B	4	1234	A	8
1602	B	1	3565	C	3	9627	B	3	1401	E	1
1603	A	1	3566	C	3	9628	B	4	2201	F	4
1604	A	6	3567	C	4	9629	B	4	2202	F	3
1606	A	3	3568	C	4	9630	B	4	2204	D	7
1611	B	7	3569	C	4	9631	B	5	2205	F	7
1612	C	7	3570	C	4	9632	B	5	2206	F	8
1613	B	9	3571	C	5	9633	B	5	2207	E	8
2551	C	2	3572	C	5	9634	B	5	2208	D	6
2552	C	2	3573	C	5	9635	B	6	2209	D	9
2553	C	2	3574	C	5	9636	B	6	2210	F	5
2554	C	2	3575	C	6	9637	B	6	2211	F	5
2555	C	2	3576	C	6	9638	B	6	2212	F	5
2556	C	2	3601	C	2	9639	B	5	2214	D	7
2559	C	3	3602	B	2	9640	C	3	2215	D	8
2560	C	3	3603	B	2	9641	A	6	2216	D	8
2561	C	4	3604	B	2	9642	A	6	2217	F	7
2562	C	4	3605	B	2	9643	A	6	2302	E	6
2563	C	3	3606	A	2	9644	A	6	2304	E	5
2564	C	3	3607	A	2	9645	A	6	2305	E	6
2565	C	4	3608	A	2	9646	C	5	2401	E	2
2566	C	4	3609	A	2	9647	A	6	3204	D	7
2567	C	3	3610	A	2	9648	A	6	3207	E	5
2568	C	3	3611	A	2	9649	B	5	3208	F	8
2569	C	5	3612	A	2	9650	B	5	3209	F	6
2570	C	5	3613	B	4	9651	A	5	3210	D	9
2571	C	5	3614	B	4	9652	A	5	3211	F	6
2572	C	5	3615	B	4	9653	A	5	3217	E	6
2573	C	5	3616	B	4	9654	A	4	3218	D	7
2574	C	5	3617	B	6	9655	A	4	5202	F	2
2575	C	6	3618	B	6	9656	A	4	5204	E	8
2601	C	2	3621	C	8	9657	A	4	6202	E	3
2602	C	2	3622	C	8	9658	A	4	6204	E	8
2603	B	2	3623	C	8	9659	A	4	6205	E	7
2604	B	2	3624	C	8	9660	A	4	6206	D	7
2605	B	2	3625	B	8	9661	A	3	6207	D	7
2606	B	2	3626	B	8	9662	A	3	6208	D	7
2607	A	2	3627	B	8	9663	A	6	6209	D	7
2608	A	2	3628	B	8	9664	A	3	6210	D	9
2609	A	2	3629	C	8	9665	A	3	6211	F	5
2610	A	2	3630	C	8	9666	A	3	6212	F	5
2611	A	2	3631	C	8	9667	A	5	6213	F	5
2612	A	2	3632	C	8	9668	A	3	6214	F	5
2613	C	2	3633	B	6	9671	B	9	6215	F	5
2614	B	2	3634	A	6	9672	B	9	6216	F	5
2615	B	2	3635	A	6	9673	B	9	6302	F	6
2616	B	2	3637	B	6	9674	B	9	7302	F	6
2617	B	2	5551	C	6	9675	B	9	9201	E	8
2618	B	2	5601	B	3	9676	C	9	9202	D	8
2619	A	2	5602	B	3	9677	C	9	9203	F	4
2620	A	2	5603	B	3	9678	C	9	9204	F	4
2621	A	2	5604	A	3	9679	C	9	9205	F	2
2622	A	2	5605	B	4	9680	C	9	9206	F	2
2623	A	2	5606	A	4	9681	C	7	9207	E	6
2624	A	2	5607	B	5	9682	C	7	9208	E	6
2631	C	7	5608	B	5	9683	B	7	9209	F	5
2632	C	7	5609	A	5	9684	B	7	9210	F	3
2633	C	7	5610	A	5	9685	B	8	9211	F	7
2634	C	7	5611	A	4	9686	B	8	9212	E	8
2635	B	7	5612	A	4	9687	C	8	9213	E	8
2636	B	7	6605	B	5	9688	C	8	9214	D	8
2637	B	7	6608	B	6	9689	C	8	9215	D	7
2638	B	7	7551	C	3	9690	C	8	9216	D	7
2639	C	8	7552	C	3	9691	B	8	9217	D	7
2640	C	8	7553	C	3	9692	B	8	9218	E	6
2641	C	8	7554	C	3	----	----	----	9219	E	8
2642	C	8	7555	C	4	----	----	----	9220	E	8
2643	B	8	7601	A	6	1201	F	3	9221	F	3
2644	B	8	7602	A	6	1202	F	2	9222	F	3
2645	B	8	9501	C	3	1203	F	2	9223	E	2
2646	B	8	9601	C	2	1204	F	2	9224	E	2
2647	B	3	9602	B	2	1206	F	2	9225	F	2
2648	B	3	9603	B	2	1207	F	3	9227	D	7
2649	B	3	9604	A	2	1208	F	3			
2650	A	3	9605	A	2	1211	F	3			
2651	B	4	9606	A	2	1213	D	8			
2652	B	5	9607	B	3	1214	D	8			
2653	A	5	9608	B	3	1215	D	9			
2654	A	5	9609	B	3	1216	D	8			
2655	A	5	9610	A	4	1217	D	7			
2656	A	4	9611	A	2	1218	E	9			
2659	B	6	9612	A	2	1219	E	9			
3551	C	2	9613	A	2	1221	F	2			
3552	C	2	9614	A	3	1222	D	8			
3553	C	2	9615	B	3	1223	F	2			
3554	C	2	9616	B	3	1224	A	7			
3555	C	4	9617	B	3	1225	A	7			
3556	C	4	9618	B	3	1226	A	7			
3557	C	4	9619	B	3	1227	A	7			
3558	C	4	9620	B	3	1228	A	7			
3559	C	5	9621	B	3	1229	F	3			
3560	C	5	9622	B	3	1230	F	4			
3561	C	3	9623	B	3	1231	A	8			


1201	A4	2201	A4	2211	A4	2510	B7	2520	F6	3507	F4	3517	B5	3527	C4	6204	A5	9205	B6	9510	D5	9521	F3	9545	D5
1202	A4	2202	A4	2212	A4	2511	B7	2521	F6	3508	F4	3518	B5	3528	C4	6205	A5	9206	B6	9511	D5	9522	F3	9546	D5
1203	A4	2203	A4	2213	A4	2512	B7	2522	F6	3509	F4	3519	B5	3529	C4	6206	A5	9207	B6	9512	D5	9523	F3		
1204	A4	2204	A4	2214	A4	2513	B7	2523	F6	3510	F4	3520	B5	3530	C4	6207	A5	9208	B6	9513	D5	9524	F3		
1205	A4	2205	A4	2215	A4	2514	B7	2524	F6	3511	F4	3521	B5	3531	C4	6208	A5	9209	B6	9514	D5	9525	F3		
1206	A4	2206	A4	2216	A4	2515	B7	2525	F6	3512	F4	3522	B5	3532	C4	6209	A5	9210	B6	9515	D5	9526	F3		
1207	A4	2207	A4	2217	A4	2516	B7	2526	F6	3513	F4	3523	B5	3533	C4	6210	A5	9211	B6	9516	D5	9527	F3		
1208	A4	2208	A4	2218	A4	2517	B7	2527	F6	3514	F4	3524	B5	3534	C4	6211	A5	9212	B6	9517	D5	9528	F3		
1209	A4	2209	A4	2219	A4	2518	B7	2528	F6	3515	F4	3525	B5	3535	C4	6212	A5	9213	B6	9518	D5	9529	F3		
1210	A4	2210	A4	2220	A4	2519	B7	2529	F6	3516	F4	3526	B5	3536	C4	6213	A5	9214	B6	9519	D5	9530	F3		
1211	A4	2221	A4	2221	A4	2520	B7	2530	F6	3517	F4	3527	B5	3537	C4	6214	A5	9215	B6	9520	D5	9531	F3		
1212	A4	2222	A4	2222	A4	2521	B7	2531	F6	3518	F4	3528	B5	3538	C4	6215	A5	9216	B6	9521	D5	9532	F3		
1213	A4	2223	A4	2223	A4	2522	B7	2532	F6	3519	F4	3529	B5	3539	C4	6216	A5	9217	B6	9522	D5	9533	F3		
1214	A4	2224	A4	2224	A4	2523	B7	2533	F6	3520	F4	3530	B5	3540	C4	6217	A5	9218	B6	9523	D5	9534	F3		
1215	A4	2225	A4	2225	A4	2524	B7	2534	F6	3521	F4	3531	B5	3541	C4	6218	A5	9219	B6	9524	D5	9535	F3		
1216	A4	2226	A4	2226	A4	2525	B7	2535	F6	3522	F4	3532	B5	3542	C4	6219	A5	9220	B6	9525	D5	9536	F3		
1217	A4	2227	A4	2227	A4	2526	B7	2536	F6	3523	F4	3533	B5	3543	C4	6220	A5	9221	B6	9526	D5	9537	F3		
1218	A4	2228	A4	2228	A4	2527	B7	2537	F6	3524	F4	3534	B5	3544	C4	6221	A5	9222	B6	9527	D5	9538	F3		
1219	A4	2229	A4	2229	A4	2528	B7	2538	F6	3525	F4	3535	B5	3545	C4	6222	A5	9223	B6	9528	D5	9539	F3		
1220	A4	2230	A4	2230	A4	2529	B7	2539	F6	3526	F4	3536	B5	3546	C4	6223	A5	9224	B6	9529	D5	9540	F3		
1221	A4	2231	A4	2231	A4	2530	B7	2540	F6	3527	F4	3537	B5	3547	C4	6224	A5	9225	B6	9530	D5	9541	F3		

[illegible]


1505 A4	1510 A4	2533 A3	3531 A3	3534 A4	7529 A3	9530 A3	9548 A3
1507 A1	1511 A4	2534 A4	3532 A1	3535 A3	7530 A2	9531 A2	
1509 A2	1521 A3	3530 A3	3533 A3	6529 A2	9508 A1	9536 A1	




VOLUME BOARD (PM7000)

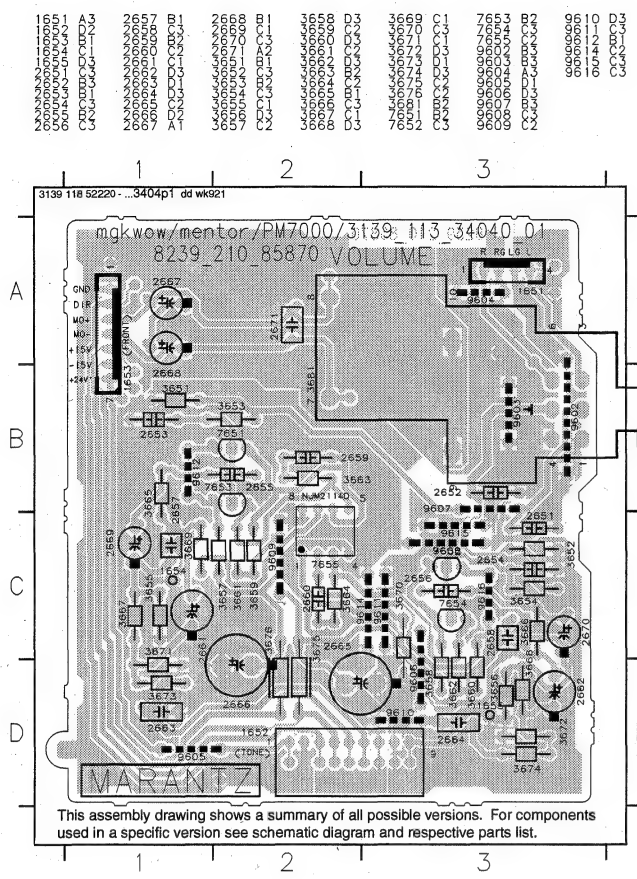

VOLUME BOARD (PM8000)

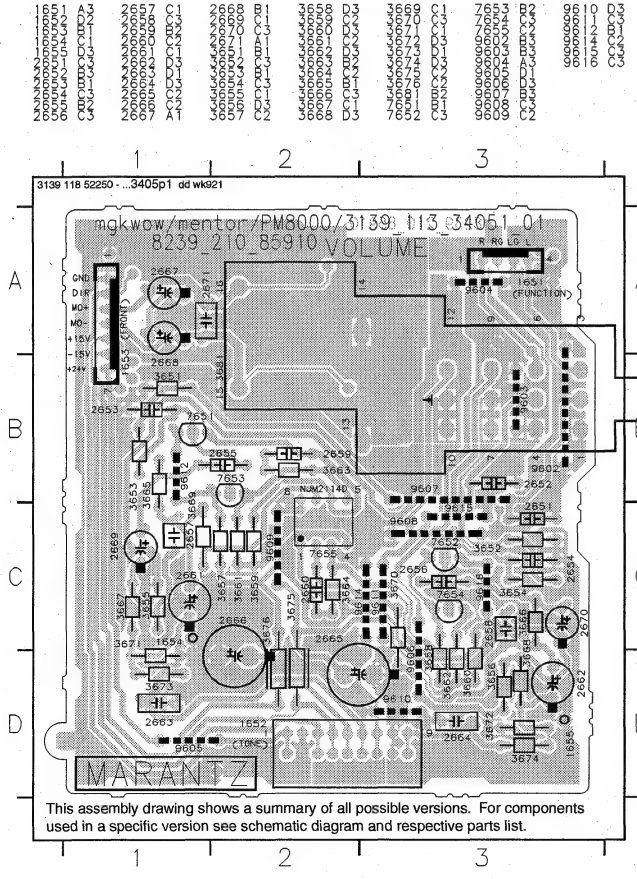


MAIN & SP PROTECT BOARD

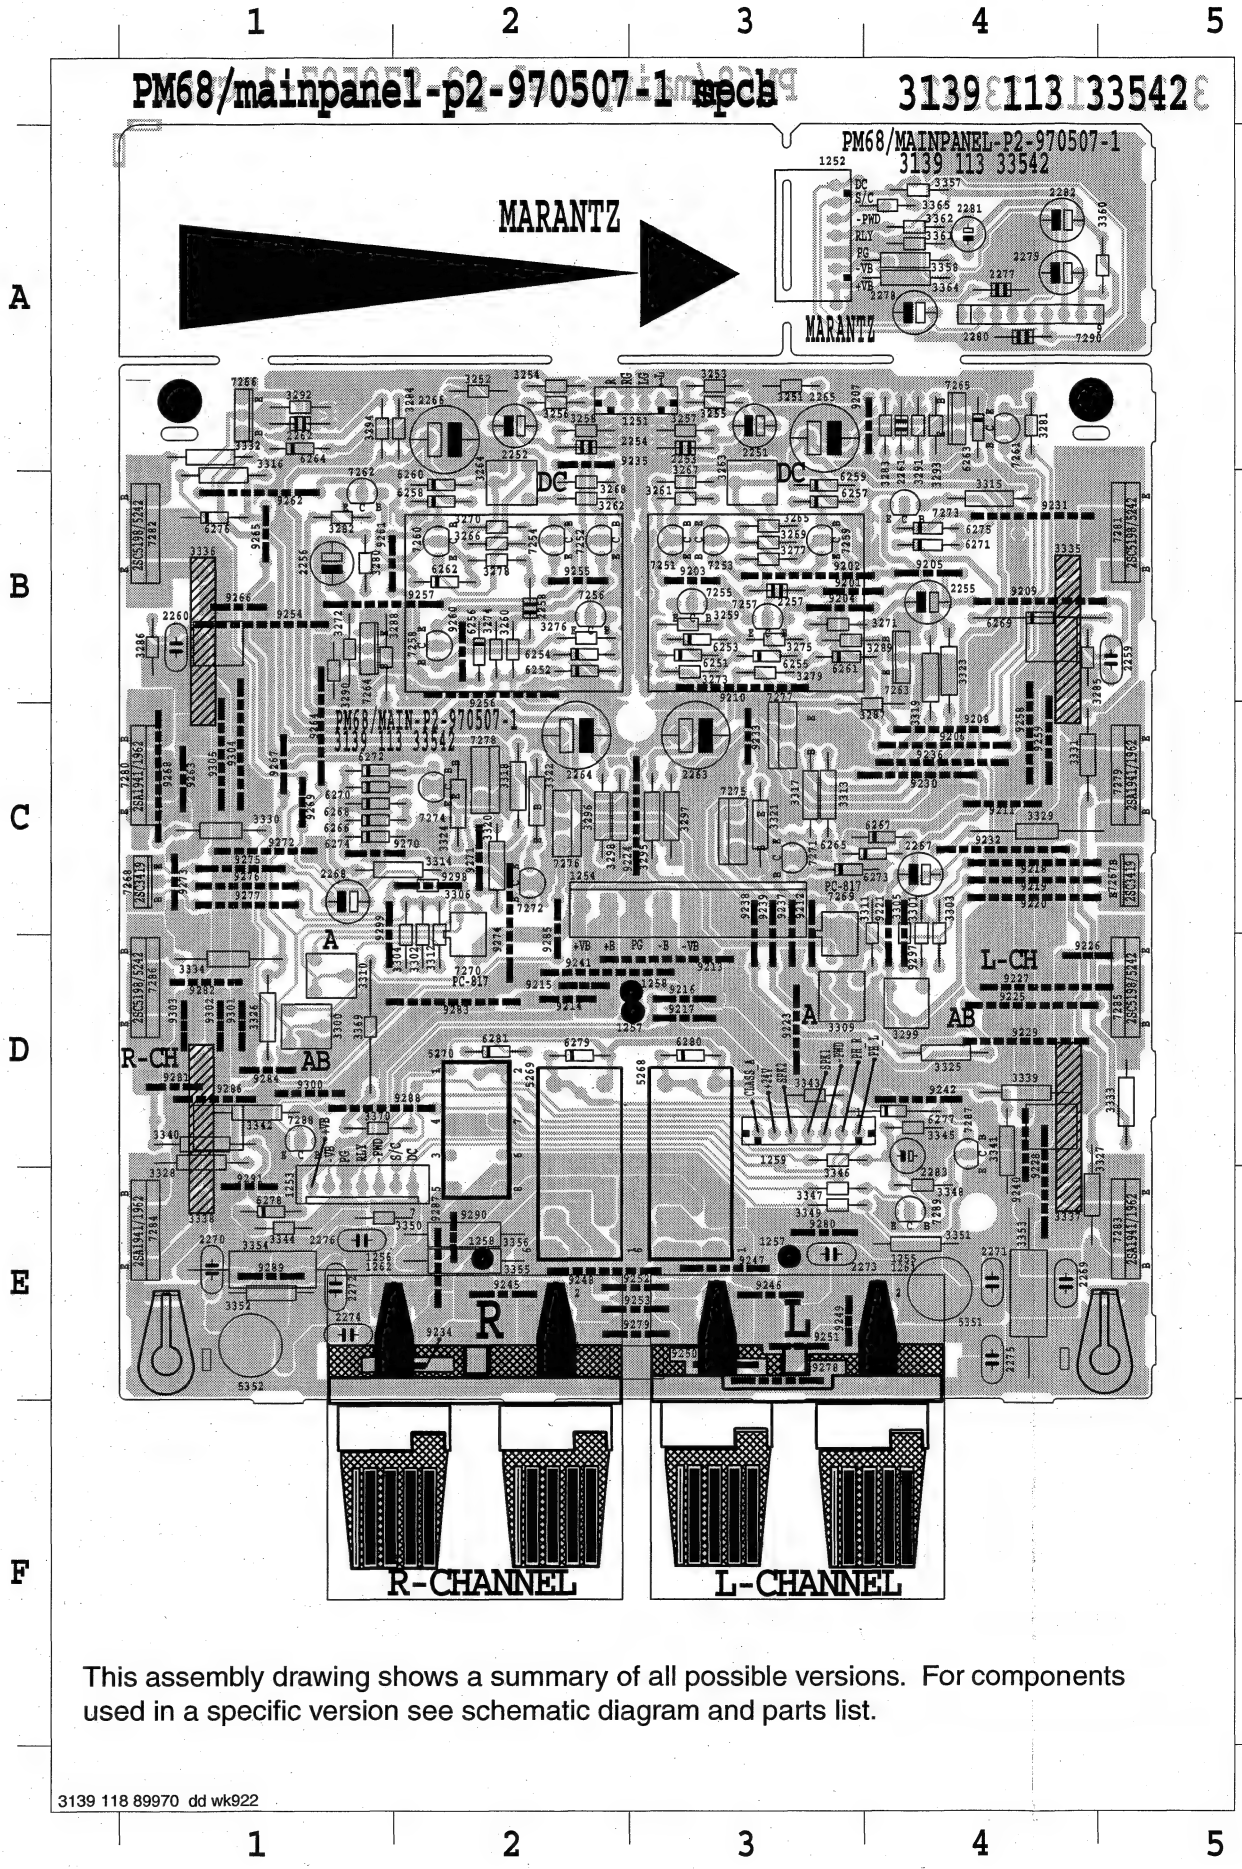

1251 A 3	3304 D 2	6281 D 2	9256 B 2
1252 A 3	3305 D 4	7251 B 3	9257 B 1
1253 E 1	3306 C 2	7252 B 2	9258 C 4
1254 C 3	3309 D 3	7253 B 3	9259 C 4
1255 F 3	3310 D 1	7254 B 2	9260 B 2
1256 F 2	3311 D 4	7255 B 3	9261 B 1
1259 D 3	3312 D 2	7256 B 2	9262 B 1
1261 F 3	3313 C 3	7257 B 3	9263 C 1
1262 F 2	3314 C 2	7258 B 2	9264 C 1
2251 A 3	3315 B 4	7259 B 3	9265 B 1
2252 A 2	3316 B 1	7260 B 2	9266 B 1
2253 A 3	3317 C 3	7261 A 4	9267 C 1
2254 A 2	3318 C 2	7262 B 1	9268 C 1
2255 B 4	3319 B 4	7263 B 4	9269 C 1
2256 B 1	3320 C 2	7264 B 1	9270 C 1
2257 B 3	3321 C 3	7265 A 4	9271 C 2
2258 B 2	3322 C 2	7266 A 1	9272 C 1
2259 B 5	3323 B 4	7267 C 5	9273 C 1
2260 B 1	3324 C 2	7268 C 1	9274 C 2
2261 A 4	3325 D 4	7269 D 3	9275 C 1
2262 A 1	3326 D 1	7270 D 2	9276 C 1
2263 C 3	3327 E 4	7271 C 3	9277 C 1
2264 C 2	3328 D 1	7272 C 2	9278 E 3
2265 A 3	3329 C 4	7273 B 4	9279 E 3
2266 A 2	3330 C 1	7274 C 2	9280 E 3
2267 C 4	3331 C 4	7275 C 3	9281 D 1
2268 C 1	3332 A 1	7276 C 2	9282 D 1
2269 E 4	3333 D 5	7277 C 3	9283 D 2
2270 E 1	3334 D 1	7278 C 2	9284 D 1
2271 E 4	3335 B 4	7279 C 5	9285 C 2
2272 E 1	3336 B 1	7280 C 1	9286 D 1
2273 E 3	3337 D 4	7281 B 5	9287 E 2
2274 E 1	3338 D 1	7282 B 1	9288 D 1
2275 E 4	3339 D 4	7283 E 5	9289 E 1
2276 E 1	3340 D 1	7284 E 1	9290 E 2
2277 A 4	3341 D 4	7285 D 5	9291 E 1
2278 A 4	3342 D 1	7286 D 1	9297 D 4
2279 A 4	3343 D 3	7287 D 4	9298 C 2
2280 A 4	3344 E 1	7288 D 1	9299 D 1
2281 A 4	3345 D 4	7289 E 4	9300 D 1
2282 A 4	3346 D 3	7290 A 4	9301 D 1
2283 D 4	3347 E 3	9201 B 3	9302 D 1
3251 A 3	3348 E 4	9202 B 3	9303 D 1
3252 A 2	3349 E 3	9203 B 3	9304 C 1
3253 A 3	3350 E 1	9204 B 3	9305 C 1
3254 A 2	3351 E 4	9205 B 4	----
3255 A 3	3352 E 1	9206 C 4	
3256 A 2	3353 E 4	9207 A 4	
3257 A 3	3354 E 1	9208 C 4	
3258 A 2	3355 E 2	9209 B 4	
3259 B 3	3356 E 2	9210 B 3	
3260 B 2	3357 A 4	9211 C 4	
3261 B 3	3358 A 4	9212 D 3	
3262 B 2	3360 A 5	9213 D 3	
3263 B 3	3361 A 4	9214 D 2	
3264 B 2	3362 A 4	9215 D 2	
3265 B 3	3364 A 4	9216 D 3	
3266 B 2	3365 A 4	9217 D 3	
3267 B 3	3369 D 1	9218 C 4	
3268 B 2	3370 D 1	9219 C 4	
3269 B 3	3368 E 3	9220 C 4	
3270 B 2	3269 E 2	9221 D 4	
3271 B 3	3270 D 2	9222 D 3	
3272 B 1	3351 E 4	9224 C 3	
3273 B 3	3352 E 1	9225 D 4	
3274 B 2	3251 B 3	9226 D 4	
3275 B 3	3252 B 2	9227 D 4	
3276 B 2	3253 B 3	9228 E 4	
3277 B 3	3254 B 2	9229 D 4	
3278 B 2	3255 B 3	9230 C 4	
3279 B 3	3256 B 2	9231 B 4	
3280 B 1	3257 B 3	9232 C 4	
3281 A 4	3258 B 2	9233 C 3	
3282 B 1	3259 B 3	9234 E 2	
3283 A 4	3260 B 2	9235 A 2	
3284 A 2	3261 B 3	9236 C 4	
3285 B 4	3262 B 2	9237 D 3	
3286 B 1	3263 A 4	9238 D 3	
3287 C 4	3264 A 1	9239 D 3	
3288 B 1	3265 C 4	9240 D 4	
3289 B 3	3266 C 1	9241 D 2	
3290 B 1	3267 C 4	9242 D 4	
3291 A 4	3268 C 1	9243 D 3	
3292 A 1	3269 B 4	9244 D 3	
3293 A 4	3270 C 1	9245 E 2	
3294 A 1	3271 B 4	9246 E 3	
3295 C 3	3272 C 1	9247 E 3	
3296 C 2	3273 C 3	9248 E 2	
3297 C 3	3274 C 1	9249 E 3	
3298 C 2	3275 B 4	9250 E 3	
3299 D 4	3276 B 1	9251 E 3	
3300 D 1	3277 D 4	9252 E 3	
3301 D 4	3278 E 1	9253 E 3	
3302 D 2	3279 D 2	9254 B 1	
3303 D 4	3280 D 3	9255 B 2	

7. EXPLODED VIEW AND PARTS LIST
EXPLODED VIEW

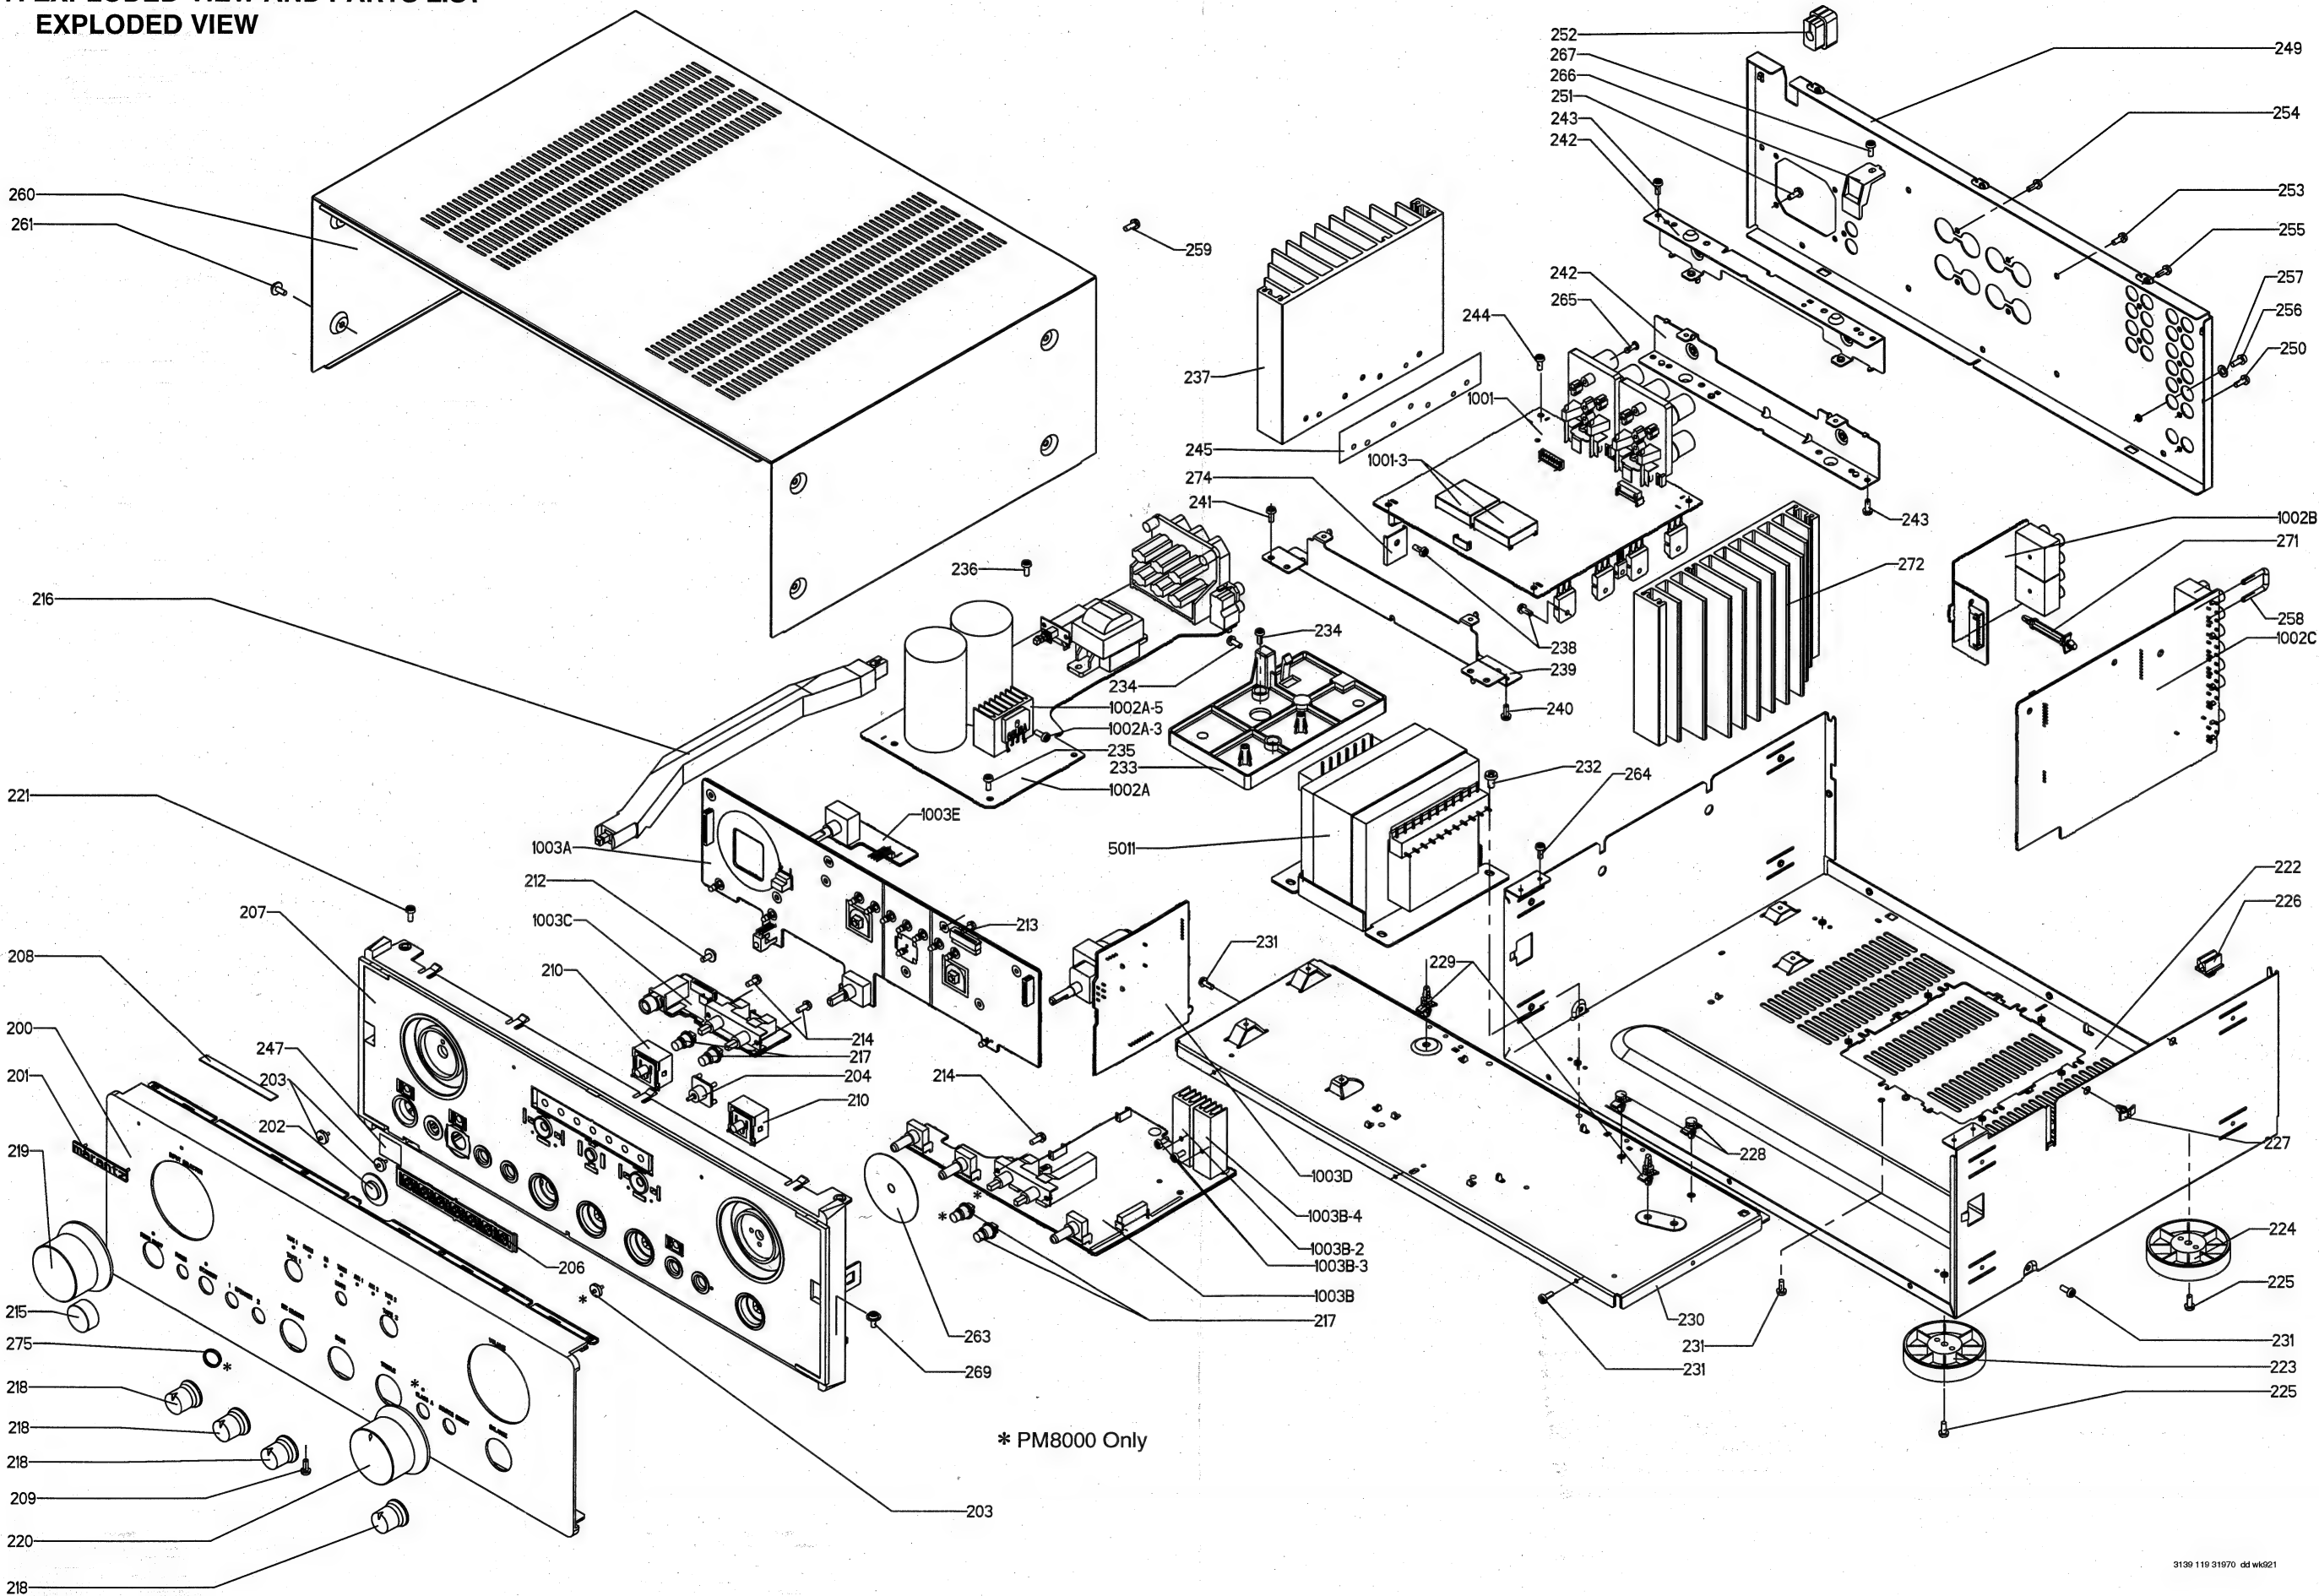

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
200	PM7000 BLK	3139 117 88070	FRONT PANEL BLACK
200	PM8000 BLK	3139 117 88080	FRONT PANEL BLACK
200	PM7000 GLD	3139 117 88050	FRONT PANEL GOLD
200	PM8000 GLD	3139 117 88060	FRONT PANEL GOLD
201		4822 454 11825	PLATE, INDICATION
202	BLK	3139 114 66790	WINDOW IR BLACK
202	GLD	3139 114 66800	WINDOW IR GOLD
203		3139 114 66920	LIGHT GUIDE POWER/CLASS
204		3139 114 66900	LIGHT GUIDE MUTE
206		3139 114 66910	LIGHT GUIDE SOURCE
207	BLK	3139 114 66940	CABINET, FRONT BLACK
207	GLD	3139 117 88580	CABINET, FRONT GOLD
210	BLK	3139 114 66930	BUTTON TAPE BLACK
210	GLD	3139 117 88610	BUTTON TAPE GOLD
215	BLK	4822 410 12499	PUSH BUTTON, POWER
215	GLD	4822 410 12552	PUSH BUTTON, POWER
216		3139 114 66970	LINK, POWER
217	BLK	3139 114 66770	BUTTON, PUSH BLACK
217	GLD	3139 117 88600	BUTTON, PUSH GOLD
218	BLK	3139 114 66750	KNOB, ROTARY BLACK
218	GLD	3139 117 88590	KNOB, ROTARY GOLD
219	BLK	3139 117 88040	KNOB, SELECTOR BLACK
219	GLD	3139 117 88110	KNOB, SELECTOR GOLD
220	BLK	3139 117 88030	KNOB, VOL BLACK
220	GLD	3139 117 88090	KNOB, VOL GOLD
223		4822 462 42129	FOOT FRONT
224		4822 462 42129	FOOT REAR
252		4822 532 60948	BUSH, PLASTIC
256		4822 502 13921	SCREW, STEEL
271		4822 404 10933	PLASTIC SUPPORT(LCBS-22)
▲ 385	N	4822 321 11139	MAINS CORD
▲ 385	U	4822 321 11464	MAINS CORD
▲ 385	F	4822 321 11349	MAINS CORD
1605		4822 323 10406	FLEX CABLE 15P
▲ 5011	PM7000 N	4822 146 10823	MAINS TRANSFORMER
▲ 5011	PM8000 N	4822 146 10844	MAINS TRANSFORMER
▲ 5011	PM7000 U	4822 146 10854	MAINS TRANSFORMER
▲ 5011	PM8000 F	4822 146 10853	MAINS TRANSFORMER
			PACKING
384		3139 228 82240	REMOTE CONTROL RC0465/02
387	N	3139 116 18910	USER GUIDE
387	U	3139 116 18920	USER GUIDE
387	F	3139 116 18930	USER GUIDE

8. IDLING CURRENT AND DC OFFSET VOLTAGE ALIGNMENT

8.1 Quiescent Current Adjustment for Class AB

- Set to CD mode with no input, minimum volume position & mains supply at 230 V \pm 5 %.
- Power up the unit, adjust **SLOWLY** 3299 (L) & 3300 (R) until voltage across L-Channel ----- 3335 (T007 / T006) & 3337 (T009 / T010), R-Channel ----- 3336 (T013 / T014) & 3338 (T015 / T016) is as per the table below.

Time	Voltage
after 30 sec to 1 min*	0.3 mV to < 0.4 mV

- After 30 min, the voltage should settle down to 18 mV \pm 3 mV.
- * Start from cold condition.

8.2 Quiescent Current Adjustment for Class A.

- Next, switch to Class A operation. Adjust **SLOWLY** 3309 (L) & 3310 (R) until voltage across L-Channel ----- 3335 (T007 / T006) & 3337 (T009 / T010), R-Channel ----- 3336 (T013 / T014) & 3338 (T015 / T016) is as per the table below.


Time	Voltage
after 0 sec to 30 sec**	65 mV to < 70 mV

- After 30 min, the voltage should settle down to 90 mV \pm 5 mV.
- ** Continue immediately after 8.1

REMARKS:

- Please take note that for both Class AB & A alignment, at all time during adjustment, refer to the higher reading of each channel.

Quiescent Current Measurement point



POS.No.
3335
3337
3336
3338

8.3 DC Offset.

- Adjust 3263 and 3264 until DC offset voltage is less than \pm 10 mV at Speaker output terminal.

8.アイドリング電流およびDCオフセット電圧調整

8.1 アイドリング電流調整 (Class AB)

- 1) 本体の電源スイッチを入れる前に、ボリュームを最小に、バランス及びトーンコントロールをセンターに合わせます。
- 2) CDモードにし、電源電圧を100Vにします。
- 3) セメント抵抗、3335 (T007 / T006) 、3337 (T009 / T010) のLチャンネルと3336 (T013 / T014) 、3338 (T015 / T016) のRチャンネル各々の電圧が下記の値になるまで、半固定抵抗3299 (L) と3300 (R) をゆっくり調整します。

時間	電圧
30秒ー1分*	0.3mV以上0.4mV以下

30分後、電圧は18mV \pm 3mVに安定します。

* 冷却状態からスタートします。

8.2アイドリング電流調整 (Class A)

- 1) A クラス動作に切り換えます。
- 2) セメント抵抗3335 (T007 / T006) 、3337 (T009 / T010) のLチャンネルと3336 (T013 / T014) 、3338 (T015 / T016) のRチャンネル各々の電圧が下記の値になるまで、半固定抵抗3309 (L) と3310 (R) ゆっくり調整します。


時間	電圧
0秒ー30秒 **	65mV以上70mV以下

30分後、電圧は90mV \pm 5mVに安定します。

** 切換え後、すぐに行ってください。

注意：Aクラス動作及びABクラス動作のアイドリング電流調整において、同チャンネル内の2ヶ所の測定点で指示値に差異があった場合は、高い方の電圧値が調整範囲内となるようにします。

アイドリング電流測定点



POS.No.
3335
3337
3336
3338

8.3 DCオフセット電圧調整

- DCオフセット電圧が、スピーカー出力端子で10mV以下になるまで半固定抵抗3263と3264を調整します。

9. ELECTRICAL PARTS LIST

ASSIGNMENT OF COMMON PARTS CODES.

RESISTORS

R* ** : 1) GD05 x x x 140, Carbon film fixed resistor, $\pm 5\%$ 1/4W

R* ** : 2) GD05 x x x 160, Carbon film fixed resistor, $\pm 5\%$ 1/6W

Examples ;

① Resistance value

0.1 Ω 001	10 Ω 100	1k Ω 102	100k Ω 104
0.5 Ω 005	18 Ω 180	2.7k Ω 272	680k Ω 684
1 Ω 010	100 Ω 101	10k Ω 103	1M Ω 105
6.8 Ω 068	390 Ω 391	22k Ω 223	4.7M Ω 475

Note : Please distinguish 1/4W from 1/6W by the shape of parts used actually.

CAPACITORS

C* ** : CERAMIC CAP.

3) DD1 x x x x 370, Ceramic capacitor
Disc type
Temp.coef. P350~N1000, 50V
③ Capacity value
② Tolerance

Examples

② ATolerance (Capacity deviation)

± 0.25 pF 0
± 0.5 pF 1
$\pm 5\%$ 5

* Tolerance of COMMON PARTS handled here are as follows :

0.5 pF - 5 pF ± 0.25 pF
6 pF - 10 pF ± 0.5 pF
12 pF - 560 pF $\pm 5\%$

③ Capacity value

0.5 pF 005	3 pF 030	100 pF 101
1 pF 010	10 pF 100	220 pF 221
1.5 p 015	47 pF 470	560 pF 561

C* ** : CERAMIC CAP.

4) DK16 x x x 300, High dielectric constant ceramic capacitor
Disc type
Temp.chara. 2B4, 50V
④ Capacity value

Examples

④ Capacity value

100 pF 101	1000 pF 102	10000 pF 103
470 pF 471	2200 pF 222	

C* ** : 5) ELECTROLY CAP. (), 6) FILM CAP ()

5) EA x x x x x 10, Electrolytic capacitor
One-way lead type Tolerance $\pm 20\%$
⑥ Working voltage
⑤ Capacity value

Examples

⑤ Capacity value

0.1 μ F 04	4.7 μ F 475	100 μ F 107
0.33 μ F 334	10 μ F 106	330 μ F 337
1 μ F 105	22 μ F 226	1100 μ F 118
		2200 μ F 228

⑥ Working voltage

6.3 V 006	25 V 025
10 V 010	35 V 035
16 V 016	50 V 050

6) DF15 x x x 350 Plastic film capacitor
DF15 x x x 310 One-way type, Mylar $\pm 5\%$ 50V
DF16 x x x 310 Plastic film capacitor
One-way type, Mylar $\pm 10\%$ 50V

⑦ Capacity value

Examples

⑦ Capacity value

0.001 μ F (1000pF) 102	0.1 μ F 104
0.0018 μ F 182	0.56 μ F 564
0.01 μ F 103	1 μ F 105
0.015 μ F 151	

NOTE : 1) The above CODES(R* **, R* ** C* **, C* **) and C* **) are omitted on the schematic diagram in some case.

2) On the occasion, be confirmed the common parts on the parts list.

3) Refer to "Common Parts List" for the other common parts(R105, DD4, DK4).

NOTE ON SAFETY FOR FUSIBLE RESISTOR :

The suppliers and their type numbers of fusible resistors are as follows ;

1. KOA Corporation

Part No.(MJI)	Type No.(KOA)	Description
NH05 x x x 140	RF25S x x x Ω J	($\pm 5\%$ 1/4W)
NH05 x x x 120	RF50S x x x Ω J	($\pm 5\%$ 1/2W)
NH85 x x x 110	RF73B2A x x x Ω J	($\pm 5\%$ 1/10W)
NH95 x x x 140	RF73B2E x x x Ω J	($\pm 5\%$ 1/4W)

* Resistance value

Resistance value(0.1 Ω - 10k Ω)

2. Matsushita Electronic Components Co., Ltd

Part No.(MJI)	Type No.(MEC)	Description
NF05 x x x 140	ERD-2FCJ x x x	($\pm 5\%$ 1/4W)
RF05 x x x 140		
NF02 x x x 140	ERD-2FCG x x x	($\pm 2\%$ 1/4W)
RF02 x x x 140		

Examples :



* Resistance value

0.1 Ω 001	10 Ω 100	1k Ω 102	100k Ω 104
0.5 Ω 005	18 Ω 180	2.7k Ω 272	680k Ω 684
1 Ω 010	100 Ω 101	10k Ω 103	1M Ω 105
6.8 Ω 068	390 Ω 391	22k Ω 223	4.7M Ω 475


ABBREVIATION AND MARKS

ANT. : ANTENNA	BATT. : BATTERY
CAP. : CAPACITOR	CER. : CERAMIC
CONN. : CONNECTING	DIG. : DIGITAL
HP : HEADPHONE	MIC. : MICROPHONE
μ -PRO : MICROPROCESSOR	REC. : RECORDING
RES. : RESISTOR	SPK : SPEAKER
SW : SWITCH	TRANSF. : TRANSFORMER
TRIM. : TRIMMING	TRS. : TRANSISTOR
VAR. : VARIABLE	X ' TAL : CRYSTAL

NOTE ON SAFETY:

Symbol  Fire or electrical shock hazard. Only original parts should be used to replaced any part marked with symbol  . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

安全上の注意 :

 がついている部品は、安全上重要な部品です。必ず指定されている部品番号の部品を使用して下さい。

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
			FUNCTION CIRCUIT BOARD CAPACITORS				SEMICONDUCTORS
2551		4822 126 12147	CER. 22NF 10% 25V	6605		4822 130 30621	DIODE 1N4148
2552		4822 126 12147	CER. 22NF 10% 25V	6608		4822 130 30621	DIODE 1N4148
2553	N	4822 122 33519	CER. 470pF 10% 50V	7555		4822 209 31153	IC NJM2114D
2554	N	4822 122 33519	CER. 470pF 10% 50V	7551			
2555	N	4822 126 14316	CER. 680pF 10% 50V			4822 130 42839	FET 2SK369BL
2555	U, F	4822 122 33849	CER. 150pF 10% 50V	7554			
2556	N	4822 126 14316	CER. 680pF 10% 50V	7601		4822 130 44568	TRS. BC557B
2556	U, F	4822 122 33849	CER. 150pF 10% 50V	7602		4822 130 40959	TRS. BC547B
2559		4822 124 12023	ELECT 47μF 20% 25V				MISCELLANEOUS
2560		4822 124 12023	ELECT 47μF 20% 25V	1551		4822 265 10311	CONNECTOR, 2P
2561		4822 121 70654	FILM 2N2 10% 50V	1601		4822 265 10311	CONNECTOR, 2P
2562		4822 121 70654	FILM 2N2 10% 50V	1602	PM7000	4822 267 20453	CONNECTOR, 6P
2563		4822 121 51399	FILM 47NF 10% 50V	1602	PM8000	4822 265 11061	CONNECTOR, 6P
2564		4822 121 51399	FILM 47NF 10% 50V	1603	PM7000	4822 267 31452	CONNECTOR, CABLE/WIRE
2565		4822 121 10685	FILM 1.8NF 10% 50V	1603	PM8000	4822 265 30996	CONNECTOR, CABLE/WIRE
2566		4822 121 10685	FILM 1.8NF 10% 50V	1604		4822 267 50915	CONNECTOR, 15P
2567		4822 121 41935	FILM 12NF 5% 250V	5551		4822 280 20501	RELAY MR62-24SR
2568		4822 121 41935	FILM 12NF 5% 250V	5601			
2569		4822 124 12024	ELECT 10μF 20% 16V			4822 280 20501	RELAY MR62-24SR
2570		4822 124 12024	ELECT 10μF 20% 16V	5612			
2571		4822 121 10696	FILM 4.7NF 2% 50V				TAPE IN/OUT CIRCUIT BOARD CAPACITORS
2572		4822 121 10696	FILM 4.7NF 2% 50V				
2573		4822 124 12022	ELECT 220μF 20% 25V	2631			
2574		4822 124 12022	ELECT 220μF 20% 25V			4822 126 12147	CER. 22NF 10% 25V
2575		4822 124 40248	ELECT 10μF 20% 63V	2638			
2601				2639			
		4822 126 12147	CER. 22NF 10% 25V				
2612				2646	N	4822 122 33849	CER. 150pF 10% 50V
2613							
	N	4822 122 33849	CER. 150pF 10% 50V				RESISTORS
2624							
2647				3621			
		4822 124 40248	ELECT 10μF 20% 63V			4822 116 83866	1M 5% 1/6W
2656				3628			
2659		4822 124 11566	ELECT 47μF 20% 50V	3629			
						4822 116 83883	470R 5% 0.5W
				3632			
			RESISTORS				MISCELLANEOUS
3551		4822 116 83872	220R 5% 0.5W	1611	PM7000	4822 267 31452	CONNECTOR, CABLE/WIRE
3552		4822 116 83872	220R 5% 0.5W	1611	PM8000	4822 265 30996	CONNECTOR, CABLE/WIRE
3553		4822 116 83884	47K 5% 0.5W	1612	PM7000	4822 267 31452	CONNECTOR, CABLE/WIRE
3554		4822 116 83884	47K 5% 0.5W	1612	PM8000	4822 265 30996	CONNECTOR, CABLE/WIRE
3555							
		4822 116 52283	4K7 5% 0.5W				VOLUME CIRCUIT BOARD CAPACITORS
3560							
3561		4822 116 52206	120E 5% 0.5W	2653		4822 122 33195	CER. 100pF 10% 50V
3562		4822 116 52206	120E 5% 0.5W	2654		4822 122 33195	CER. 100pF 10% 50V
3563		4822 116 52175	100E 5% 0.5W	2657		4822 122 33524	CER. 22pF 5% 50V
3564		4822 116 52175	100E 5% 0.5W	2658		4822 122 33524	CER. 22pF 5% 50V
3565		4822 116 52234	100K 5% 0.5W	2659		4822 126 12339	CER. 2.2NF 10%
3566		4822 116 52234	100K 5% 0.5W	2660		4822 126 12339	CER. 2.2NF 10%
3567		4822 116 52289	5K6 5% 0.5W	2661		4822 124 12026	ELECT 22μF 20% 25V
3568		4822 116 52289	5K6 5% 0.5W	2662		4822 124 12026	ELECT 22μF 20% 25V
3569		4822 116 52175	100E 5% 0.5W	2663		4822 121 10686	FILM 4.7NF 10% 50V
3570		4822 116 52175	100E 5% 0.5W	2664		4822 121 10686	FILM 4.7NF 10% 50V
3571		4822 116 52234	100K 5% 0.5W	2665		4822 124 12434	ELECT 220μF 20% 16V
3572		4822 116 52234	100K 5% 0.5W	2666		4822 124 12434	ELECT 220μF 20% 16V
3573		4822 116 83872	220R 5% 0.5W	2667		4822 124 40769	ELECT 4.7μF 20% 100V
3574		4822 116 83872	220R 5% 0.5W	2668		4822 124 40769	ELECT 4.7μF 20% 100V
3575		4822 052 10479	47R 5% 0.33W	2669		4822 124 12027	ELECT 2.2μF 20% 50V
3576		4822 052 10479	47R 5% 0.33W	2670		4822 124 12027	ELECT 2.2μF 20% 50V
3601				2671		4822 122 30043	CER. 10NF 80% 63V
		4822 116 83866	1M 5% 0.5W				
3618							
3633		4822 050 21003	10K 1% 0.6W				
3634		4822 050 21003	10K 1% 0.6W				
3635		4822 050 21003	10K 1% 0.6W				
3637		4822 050 21003	10K 1% 0.6W				

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
			RESISTORS				
3651	PM7000	4822 116 83874	220K 5% 0.5W	3416		4822 116 83881	390R 5% 0.5W
3651	PM8000	4822 116 52244	15K 5% 0.5W	3422			
3652	PM7000	4822 116 83874	220K 5% 0.5W	3423			
3652	PM8000	4822 116 52244	15K 5% 0.5W			4822 116 52234	100K 5% 0.5W
3653		4822 050 11002	1K 1% 0.4W	3426			
3654		4822 050 11002	1K 1% 0.4W	3427			
3655	PM7000	4822 116 52206	120E 5% 0.5W			4822 050 21003	10K 1% 0.6W
3655	PM8000	4822 116 83876	270R 5% 0.5W	3436			
3656	PM7000	4822 116 52206	120E 5% 0.5W	3437		4822 116 52234	100K 5% 0.5W
3656	PM8000	4822 116 83876	270R 5% 0.5W	3438		4822 116 52234	100K 5% 0.5W
3657				3439		4822 116 52234	100K 5% 0.5W
}		4822 116 52283	4K7 5% 0.5W	3440		4822 116 83872	220R 5% 0.5W
3662				3441		4822 116 52234	100K 5% 0.5W
3663		4822 116 83872	220R 5% 0.5W	3442		4822 050 23303	33K 1% 0.6W
3664		4822 116 83872	220R 5% 0.5W	3443		4822 116 52257	22K 5% 0.5W
3665		4822 116 83866	1M 5% 0.5W	3444		4822 116 52283	4K7 5% 0.5W
3666		4822 116 83866	1M 5% 0.5W	3445		4822 116 52256	2K2 5% 0.5W
3667	PM7000	4822 050 11002	1K 1% 0.4W	3446		4822 116 52257	22K 5% 0.5W
3667	PM8000	4822 116 52256	2K2 5% 0.5W	3447		4822 116 52175	100E 5% 0.5W
3668	PM7000	4822 050 11002	1K 1% 0.4W	3448			
3668	PM8000	4822 116 52256	2K2 5% 0.5W	}		4822 050 21003	10K 1% 0.6W
3669		4822 116 52175	100E 5% 0.5W	3451			
3670		4822 116 52175	100E 5% 0.5W	3452		4822 052 10101	100R 5% 0.33W
3671		4822 116 52234	100K 5% 0.5W	3453			
3672		4822 116 52234	100K 5% 0.5W	}		4822 050 21003	10K 1% 0.6W
3673		4822 116 83872	220R 5% 0.5W	3459			
3674		4822 116 83872	220R 5% 0.5W	3460		4822 116 52257	22K 5% 0.5W
▲ 3675		4822 052 10479	47R 5% 0.33W	3461		4822 050 21003	10K 1% 0.6W
▲ 3676		4822 052 10479	47R 5% 0.33W	3462		4822 116 83884	47K 5% 0.5W
3681	PM7000	4822 101 11789	VARIAB. 50K X2 20% 0.05W	3463		4822 050 21003	10K 1% 0.6W
3681	PM8000	4822 101 11803	VARIAB. RK16314MC(50KX2)	3464		4822 050 21003	10K 1% 0.6W
			SEMICONDUCTORS	3465		4822 116 52257	22K 5% 0.5W
7651				3466		4822 116 52195	47E 5% 0.5W
}		4822 130 42839	FET 2SK369BL	3467		4822 052 10101	100R 5% 0.33W
7654				3468			
7655		4822 209 31153	IC NJM2114D	}		4822 050 21003	10K 1% 0.6W
			FRONT CIRCUIT BOARD	3488			
			CAPACITORS	3489		4822 116 83884	47K 5% 0.5W
2401		4822 121 51387	FILM 10NF 20% 16V	3490		4822 050 21003	10K 1% 0.6W
2403		4822 121 51387	FILM 10NF 20% 16V	3491		4822 116 83884	47K 5% 0.5W
2404		4822 124 81151	ELECT 22μF 50V	3492		4822 050 21003	10K 1% 0.6W
2405		4822 124 81151	ELECT 22μF 50V	3493		4822 116 83884	47K 5% 0.5W
2406		4822 124 80818	ELECT 22M 5.5V	3494		4822 050 21003	10K 1% 0.6W
2407		4822 126 12882	CER. 100NF +80-20% 50V	3495		4822 116 83872	220R 5% 0.5W
2408		4822 124 81151	ELECT 22μF 50V	3496		4822 116 52256	2K2 5% 0.5W
2409		4822 124 81151	ELECT 22μF 50V	3541	PM8000	4822 053 10332	3K30 5% 1W
2410		4822 121 51387	FILM 10NF 20% 16V	3542		4822 050 21003	10K 1% 0.6W
2411		4822 121 51387	FILM 10NF 20% 16V	3543		4822 116 83881	390R 5% 0.5W
2412		4822 124 81151	ELECT 22μF 50V	3544		4822 050 21003	10K 1% 0.6W
2413		4822 121 51387	FILM 10NF 20% 16V	3545		4822 116 83881	390R 5% 0.5W
2414		4822 126 12882	CER. 100NF +80-20% 50V	3546		4822 050 21003	10K 1% 0.6W
2415		4822 124 81151	ELECT 22μF 50V	3547		4822 050 21003	10K 1% 0.6W
2416		4822 121 51387	FILM 10NF 20% 16V				SEMICONDUCTORS
2417		4822 121 51387	FILM 10NF 20% 16V	6401		4822 130 30621	DIODE 1N4148
2425				}			
2428		4822 126 12882	CER. 100NF +80-20% 50V	6404			
			RESISTORS	6405		4822 130 34174	DIODE BZX79-B4V7
3401		4822 052 10101	100R 5% 0.33W	6406			
3402		4822 116 52234	100K 5% 0.5W	}		4822 130 82978	LED LTL-16KPE-P
3403				6413			
}		4822 050 21003	10K 1% 0.6W	6414	PM8000	4822 130 82978	LED LTL-16KPE-P
3408				6415		4822 130 82978	LED LTL-16KPE-P
				6416		4822 130 82978	LED LTL-16KPE-P
				6417		4822 130 30621	DIODE 1N4148
				6418		4822 130 30621	DIODE 1N4148
				7401		4822 209 15719	IC TMP47C200BN
				7402		4822 209 30193	IC LB1641

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
7404		4822 130 40959	TRS. BC547B	2509		4822 122 33293	CER. 100pF 5% 50V
7405		4822 130 40959	TRS. BC547B	2510		4822 122 33293	CER. 100pF 5% 50V
7406		4822 130 40959	TRS. BC547B	2511		4822 124 40769	ELECT 4.7μF 20% 100V
7407		4822 130 44568	TRS. BC557B	2512		4822 124 40769	ELECT 4.7μF 20% 100V
7408		4822 130 40959	TRS. BC547B	2513		4822 121 51399	FILM 47NF 10% 50V
7409				2514		4822 121 51399	FILM 47NF 10% 50V
7412		4822 130 44568	TRS. BC557B	2515		4822 124 12022	ELECT 220μF 20% 25V
7413		4822 130 40959	TRS. BC547B	2516		4822 124 12022	ELECT 220μF 20% 25V
7414		4822 130 40959	TRS. BC547B	2517		4822 124 40763	ELECT 2.2μF 100 V
7415		4822 130 44568	TRS. BC557B	2518		4822 124 40763	ELECT 2.2μF 100 V
7416		4822 130 40959	TRS. BC547B	2519		4822 121 10686	FILM 4.7NF 10% 50V
7417		4822 130 44568	TRS. BC557B	2520		4822 121 10686	FILM 4.7NF 10% 50V
7418		4822 130 40959	TRS. BC547B	2535		4822 122 33195	CER. 100pF 10% 50V
7419		4822 130 44568	TRS. BC557B	2536		4822 122 33195	CER. 100pF 10% 50V
7420		4822 130 40959	TRS. BC547B				
7421		4822 130 44568	TRS. BC557B	▲ 3203		4822 052 10479	RESISTORS 47R 5% 0.33W
7422		4822 130 40959	TRS. BC547B	3501			
7423		4822 130 44568	TRS. BC557B	3504		4822 116 83866	1M 5% 0.5W
7424		4822 130 40959	TRS. BC547B	3505			
7425		4822 130 44568	TRS. BC557B	3506		4822 116 83874	220K 5% 0.5W
7426		4822 130 40959	TRS. BC547B	3507		4822 116 83874	220K 5% 0.5W
7427		4822 130 44568	TRS. BC557B	3508		4822 116 83872	220R 5% 0.5W
7428				3509		4822 116 52269	3K3 5% 0.5W
7431		4822 130 40959	TRS. BC547B	3510		4822 116 52269	3K3 5% 0.5W
7432		4822 130 44568	TRS. BC557B	3511		4822 101 11788	VARIAB. 10K X2 20% 0.05W
7433		4822 130 44568	TRS. BC557B	3512		4822 101 11788	VARIAB. 10K X2 20% 0.05W
7434		4822 130 40959	TRS. BC547B	▲ 3513		4822 052 10479	47R 5% 0.33W
				▲ 3514		4822 052 10479	47R 5% 0.33W
				3515		4822 116 52207	1K2 5% 0.5W
1401		4822 276 13114	SWITCH, PUSH BUTTON	3516		4822 116 52207	1K2 5% 0.5W
1402		4822 276 13114	SWITCH, PUSH BUTTON	3517		4822 116 52291	56K 5% 0.5W
1403		4822 273 10336	SWITCH, ROTARY	3518		4822 116 52291	56K 5% 0.5W
			SRBV14-F1620-11	3519		4822 116 52207	1K2 5% 0.5W
1407		4822 267 51322	CONNECTOR, 15P	3520		4822 116 52207	1K2 5% 0.5W
5400		4822 242 72527	FILTER, CERAMIC	3521		4822 116 52291	56K 5% 0.5W
			CST4.00MGW-TF01	3522		4822 116 52291	56K 5% 0.5W
5401		4822 157 50963	COIL 2.2μH	3523		4822 052 10479	47R 5% 0.33W
7403		4822 130 10165	REMOTE RECEIVER GP1U28XP	▲ 3524		4822 052 10479	47R 5% 0.33W
				3525		4822 116 83872	220R 5% 0.5W
				3526		4822 116 83872	220R 5% 0.5W
				3527		4822 116 83874	220K 5% 0.5W
				3528		4822 116 83874	220K 5% 0.5W
				3529		4822 101 30828	VARIAB. 100K
				3537		4822 116 52269	3K3 5%

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
			POWER CIRCUIT BOARD CAPACITORS				MAIN CIRCUIT BOARD CAPACITORS
▲ 2201		2020 558 90382	CER. CERSAF KC-F 250V S 10N PM20	2251		4822 124 12023	ELECT 47μF 20% 25V
▲ 2202		2020 558 90382	CER. CERSAF KC-F 250V S 10N PM20	2252		4822 124 12023	ELECT 47μF 20% 25V
2204	U, F	5322 121 42498	CER. 680NF 5% 63V	2253		4822 122 33197	CER. 1NF 10% 50V
2205		4822 124 12028	ELECT 12000μF 20% 63V	2254		4822 122 33197	CER. 1NF 10% 50V
2206		4822 124 12028	ELECT 12000μF 20% 63V	2255		4822 124 12022	ELECT 220μF 20% 25V
2207	PM8000	4822 124 42391	ELECT 470μF 20% 63V	2256		4822 124 12022	ELECT 220μF 20% 25V
2208	PM8000	4822 124 42391	ELECT 470μF 20% 63V	2257	PM7000	4822 122 33519	CER. 470pF 10% 50V
2209		4822 121 51319	FILM 1μF 1% 63V	2257	PM8000	4822 126 12339	CER. 2.2NF 10%
2210		4822 124 21913	ELECT 1μF 20% 63V	2258	PM7000	4822 122 33519	CER. 470pF 10% 50V
2211		4822 124 80141	CER. 10NF 10% 50V	2258	PM8000	4822 126 12339	CER. 2.2NF 10%
2212		4822 124 80141	CER. 10NF 10% 50V	2259	PM7000	4822 126 14164	CER. 10pF 5% 50V
2214	U, F	5322 121 42498	CER. 680NF 5% 63V	2259	PM8000	4822 122 31822	CER. 4.7pF 10% 100V
2217	N	4822 121 51387	FILM 10NF 20% 16V	2260	PM7000	4822 126 14164	CER. 10pF 5% 50V
2302		4822 124 12022	ELECT 220μF 20% 25V	2260	PM8000	4822 122 31822	CER. 4.7pF 10% 100V
2304		4822 124 12056	ELECT 1000μF 20% 35V	2261	PM7000	4822 122 33519	CER. 470pF 10% 50V
2305		4822 124 40433	ELECT 47μF 20% 25V	2261	PM8000	4822 122 33197	CER. 1NF 10% 50V
2401		4822 126 12333	CER. 100NF 10% 25V	2262	PM7000	4822 122 33519	CER. 470pF 10% 50V
			RESISTORS	2262	PM8000	4822 122 33197	CER. 1NF 10% 50V
3204	U, F	4822 050 26808	6R8 1% 0.6W	2263	PM7000	2020 012 93547	ELECT 100μF 20% 63V
▲ 3207		4822 052 10108	1R 5% 0.33W	2263	PM8000	4822 124 40257	ELECT 220μF 20% 63V
▲ 3208		4822 052 10479	47R 5% 0.33W	2264	PM7000	2020 012 93547	ELECT 100μF 20% 63V
▲ 3209		4822 052 10479	47R 5% 0.33W	2264	PM8000	4822 124 40257	ELECT 220μF 20% 63V
3210		4822 116 52234	100K 5% 0.5W	2265	PM7000	2020 012 93547	ELECT 100μF 20% 63V
3211		4822 116 52234	100K 5% 0.5W	2265	PM8000	4822 124 40257	ELECT 220μF 20% 63V
3217	PM8000	4822 053 10229	22R 5% 1W	2266	PM7000	2020 012 93547	ELECT 100μF 20% 63V
3218	PM8000	4822 053 10229	22R 5% 1W	2266	PM8000	4822 124 40257	ELECT 220μF 20% 63V
			SEMICONDUCTORS	2267		4822 124 12022	ELECT 220μF 20% 25V
6202		4822 130 30621	DIODE 1N4148	2268		4822 124 12022	ELECT 220μF 20% 25V
6204	PM8000	4822 130 30621	DIODE 1N4148	2269			
▲ 6205		4822 130 10944	DIODE BRIDGE GBU6D	2272		5322 121 42386	FILM 100NF 0.05 63V
6206				2273			
}	PM8000	4822 130 31878	DIODE 1N4003G	}	N	4822 124 80141	CER. 10NF 10% 50V
6209				2276			
▲ 6210		4822 130 31878	DIODE 1N4003G	2283		4822 124 21913	ELECT 1μF 20% 63V
}							RESISTORS
▲ 6216		4822 130 30621	DIODE 1N4148	3251		4822 116 52176	10E 5% 0.5W
6302		4822 209 80817	IC L7805CV	3252		4822 116 52176	10E 5% 0.5W
▲ 7302				3253		4822 116 83874	220K 5% 0.5W
			MISCELLANEOUS	3254		4822 116 83874	220K 5% 0.5W
▲ 1201		2422 128 02898	SWITCH, PUSH	3255		4822 050 11002	1K00 1% 0.4W
▲ 1205	N	4822 070 32502	FUSE 21802.5(2.5A)	3256		4822 050 11002	1K00 1% 0.4W
▲ 1206	N	4822 265 11009	MAINS OUTLET	3257		4822 116 52264	27K 5% 0.5W
▲ 1206	U, F	4822 265 11081	MAINS OUTLET	3258		4822 116 52264	27K 5% 0.5W
▲ 1209	N	4822 070 33152	FUSE 2183.15(3.15A)	3259		4822 116 52213	180E 5% 0.5W
▲ 1209	U, F	4822 070 36302	FUSE 21806.3(6.3A)	3260		4822 116 52213	180E 5% 0.5W
▲ 1213	PM8000	4822 071 54002	FUSE 19372(4A)	3261		4822 116 83872	220R 5% 0.5W
▲ 1214	PM8000	4822 071 54002	FUSE 19372(4A)	3262		4822 116 83872	220R 5% 0.5W
▲ 1215		4822 071 55001	FUSE 19372(500MA)	3263		4822 100 11213	VARIAB. 22K 30% LIN 0.1W
▲ 1216	PM8000	4822 071 55001	FUSE 19372(500MA)	3264		4822 100 11213	VARIAB. 22K 30% LIN 0.1W
1401		4822 267 41009	CONNECTOR, CABLE/WIRE	3265			
▲ 5202		4822 280 10337	RELAY VS-12MB-NR (1P-12V)	}		4822 116 83872	220R 5% 0.5W
▲ 5204	PM8000	4822 280 10344	RELAY LY2-0-DC24 B	3270			
▲ 5205	N	4822 146 10828	TRANSFORMER	3271		4822 116 52243	1K5 5% 0.5W
▲ 5205	U, F	4822 146 10861	TRANSFORMER	3272		4822 116 52243	1K5 5% 0.5W
				3273		4822 050 11002	1K00 1% 0.4W
				3274		4822 050 11002	1K00 1% 0.4W
				3275		4822 116 83884	47K 5% 0.5W
				3276		4822 116 83884	47K 5% 0.5W
				3277	PM7000	4822 116 83872	220R 5% 0.5W
				3277	PM8000	4822 116 52228	680E 5% 0.5W
				3278	PM7000	4822 116 83872	220R 5% 0.5W
				3278	PM8000	4822 116 52228	680E 5% 0.5W
				3279			
				}		4822 050 11002	1K 1% 0.4W
				3284			

POS. NO	VERS. COLOR	PART.NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART.NO. (PCS)	DESCRIPTION
3285		4822 116 52264	27K 5% 0.5W				SEMICONDUCTORS
3286		4822 116 52264	27K 5% 0.5W	6251			
3287		4822 116 83868	150R 5% 0.5W	}		4822 130 30621	DIODE 1N4148
3288		4822 116 83868	150R 5% 0.5W	6266			
3289	PM7000	4822 116 83874	220K 5% 0.5W	6267			
3289	PM8000	4822 116 83884	47K 5% 0.5W	}		5322 130 34834	DIODE BZX79-C3V6
3290	PM7000	4822 116 83874	220K 5% 0.5W	6270			
3290	PM8000	4822 116 83884	47K 5% 0.5W	6271		4822 130 30621	DIODE 1N4148
3291	PM7000	4822 116 83874	220K 5% 0.5W	6272		4822 130 30621	DIODE 1N4148
3291	PM8000	4822 116 83884	47K 5% 0.5W	6273			
3292	PM7000	4822 116 83874	220K 5% 0.5W	}		4822 130 30842	DIODE BAV21
3292	PM8000	4822 116 83884	47K 5% 0.5W	6278			
3293		4822 116 83868	150R 5% 0.5W	6279		4822 130 30621	DIODE 1N4148
3294		4822 116 83868	150R 5% 0.5W	6280		4822 130 30621	DIODE 1N4148
3295				6281		4822 130 30621	DIODE 1N4148
}		4822 052 10109	10E 5% 0.33W	7251			
3298				}		4822 130 43233	TRS. 2SC2240GR
3299		4822 101 11787	VARIAB. 100R 30% 0.1W	7256			
3300		4822 101 11787	VARIAB. 100R 30% 0.1W	7257			
3301		4822 116 83876	270R 5% 0.5W	}		4822 130 42949	TRS. 2SA970GR
3302		4822 116 83876	270R 5% 0.5W	7260			
3303		4822 116 52207	1K2 5% 0.5W	7261		4822 130 43233	TRS. 2SC2240GR
3304		4822 116 52207	1K2 5% 0.5W	7262		4822 130 43233	TRS. 2SC2240GR
3305		4822 116 80176	1E 5% 0.5W	7263		4822 130 61009	TRS. 2SC3423(O)
3306		4822 116 80176	1E 5% 0.5W	7264		4822 130 61009	TRS. 2SC3423(O)
3309	PM8000	4822 100 20166	VARIAB. 10K 30% LIN 0.1W	7265		5322 130 61728	TRS. 2SA1360-Y
3310	PM8000	4822 100 20166	VARIAB. 10K 30% LIN 0.1W	7266		5322 130 61728	TRS. 2SA1360-Y
3311		4822 050 11002	1K 1% 0.4W	▲ 7267		4822 130 60117	TRS. 2SC3419
3312		4822 050 11002	1K 1% 0.4W	▲ 7268		4822 130 60117	TRS. 2SC3419
3313				7269	PM8000	4822 130 90347	COUPLER /PHOTO PC817
}		4822 052 10101	100R 5% 0.33W	7270	PM8000	4822 130 90347	COUPLER /PHOTO PC817
3316				7271		4822 130 41646	TRS. BF423
3317				7272		4822 130 41646	TRS. BF423
}		4822 052 10681	680R 5% 0.33W	7273		4822 130 41782	TRS. BF422
3320				7274		4822 130 41782	TRS. BF422
3321				▲ 7275		4822 130 63634	TRS. 2SA1837Y
}		4822 052 10479	47R 5% 0.33W	▲ 7276		4822 130 63634	TRS. 2SA1837Y
3324				▲ 7277		4822 130 10941	TRS. 2SC4793
▲ 3325		4822 052 10151	150R 5% 0.33W	▲ 7278		4822 130 10941	TRS. 2SC4793
▲ 3326		4822 052 10151	150R 5% 0.33W	▲ 7279	PM7000	4822 130 10942	TRS. 2SA1941
▲ 3327				▲ 7279	PM8000	4822 130 37279	TRS. 2SA1962
}		4822 052 10109	10R 5% 0.33W	▲ 7280	PM7000	4822 130 10942	TRS. 2SA1941
▲ 3334				▲ 7280	PM8000	4822 130 10983	TRS. 2SA1962
▲ 3335				▲ 7281	PM7000	4822 130 10943	TRS. 2SC5198
}		4822 116 82049	2 X R18 3W	▲ 7281	PM8000	4822 130 10984	TRS. 2SC5242
▲ 3338				▲ 7282	PM7000	4822 130 10943	TRS. 2SC5198
3339				▲ 7282	PM8000	4822 130 10984	TRS. 2SC5242
}		4822 050 21002	1K 1% 0.6W	▲ 7283	PM7000	4822 130 10942	TRS. 2SA1941
3342				▲ 7283	PM8000	4822 130 10983	TRS. 2SA1962
3343		4822 116 52257	22K 5% 0.5W	▲ 7284	PM7000	4822 130 10942	TRS. 2SA1941
3344		4822 116 52257	22K 5% 0.5W	▲ 7284	PM8000	4822 130 10983	TRS. 2SA1962
3345		4822 116 52289	5K6 5% 0.5W	▲ 7285	PM7000	4822 130 10943	TRS. 2SC5198
3346		4822 116 52257	22K 5% 0.5W	▲ 7285	PM8000	4822 130 10984	TRS. 2SC5242
3347	PM7000	4822 116 52297	68K 5% 0.5W	▲ 7286	PM7000	4822 130 10943	TRS. 2SC5198
3347	PM8000	4822 116 83882	39K 5% 0.5W	▲ 7286	PM8000	4822 130 10984	TRS. 2SC5242
3348		4822 116 52257	22K 5% 0.5W	7287		4822 130 43233	TRS. 2SC2240GR
3349		4822 116 52297	68K 5% 0.5W	7288		4822 130 43233	TRS. 2SC2240GR
3350		4822 116 52297	68K 5% 0.5W	7289		4822 130 42949	TRS. 2SA970GR
3351		4822 052 10221	220R 5% 0.33W				
3352		4822 052 10221	220R 5% 0.33W				
3353		4822 053 12109	10R 5% 3W	1255		4822 265 11068	MISCELLANEOUS CONNECTOR,LOUDSPEAKER SOCKET LEFT
3354		4822 053 12109	10R 5% 3W				
3355		4822 053 11331	330R 5% 2W	1256		4822 265 11069	CONNECTOR,LOUDSPEAKER SOCKET RIGHT
3356		4822 053 11331	330R 5% 2W				
3369	PM8000	4822 050 11002	1K 1% 0.4W	5268		4822 280 70354	RELAY VB-24MBU-510
3370	PM8000	4822 050 11002	1K 1% 0.4W	5269		4822 280 70354	RELAY VB-24MBU-510
				5270		4822 280 20501	RELAY MR62-24SR
				5351		4822 157 70599	COIL
				5352		4822 157 70599	COIL

POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION	POS. NO	VERS. COLOR	PART NO. (PCS)	DESCRIPTION
			SPK PROTECT CIRCUIT BOARD CAPACITORS				
2277		4822 121 51387	FILM 10NF 20% 16V				
2278		4822 124 40433	ELECT 47 μ F 20% 25V				
2279		4822 124 40433	ELECT 47 μ F 20% 25V				
2281		4822 124 21913	ELECT 1 μ F 20% 63V				
2282		4822 124 40433	ELECT 47 μ F 20% 25V				
			RESISTORS				
3357		4822 116 83884	47K 5% 0.5W				
3358		4822 053 10103	10K 5% 1W				
3360		4822 116 83874	220K 5% 0.5W				
3361		4822 050 23303	33K 1% 0.6W				
3362		4822 116 52291	56K 5% 0.5W				
3364		4822 053 10223	22K 5% 1W				
3365		4822 116 52234	100K 5% 0.5W				
			SEMICONDUCTOR				
7290		4822 209 83312	IC TA7317P				
			SPK SW CIRCUIT BOARD CAPACITORS				
2533		4822 122 30043	CER. 10NF 80% 63V				
2534		4822 122 30043	CER. 10NF 80% 63V				
			RESISTORS				
3530		4822 116 52256	2K2 5% 0.5W				
3531		4822 116 52256	2K2 5% 0.5W				
3532		4822 116 52257	22K 5% 0.5W				
3533		4822 116 52176	10E 5% 0.5W				
3534		4822 116 52176	10E 5% 0.5W				
3535		4822 116 52234	100K 5% 0.5W				
			SEMICONDUCTORS				
6529		4822 130 30621	DIODE 1N4148				
7529		4822 130 44283	TRS. BC636				
7530		4822 130 44568	TRS. BC557B				
			MISCELLANEOUS				
1507		2422 128 02897	SWITCH UNIT				
1510		4822 267 31453	CONNECTOR, HLJ1540				